

SCOPE OF WORK

Conference Room Installation

Finance & Administration Building, NJDOT HQ
Ewing, Mercer County, N.J.


Project No. T0630-00

STATE OF NEW JERSEY

Honorable Philip D. Murphy, Governor
Honorable Sheila Y. Oliver, Lt. Governor

DEPARTMENT OF THE TREASURY

Elizabeth Maher Muoio, Treasurer

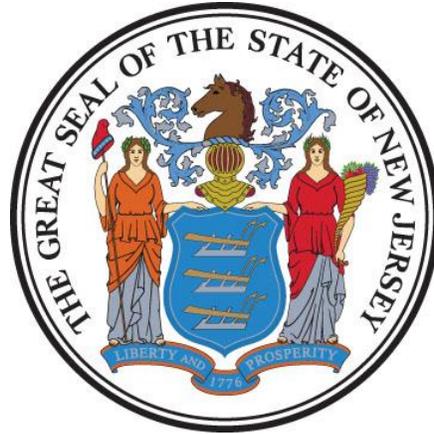

DIVISION OF PROPERTY MANAGEMENT AND CONSTRUCTION

Christopher Chianese, Director

Date: February 24, 2020

TABLE OF CONTENTS

SECTION	PAGE
I. OBJECTIVE	6
II. CONSULTANT QUALIFICATIONS	6
A. CONSULTANT & SUB-CONSULTANT PRE-QUALIFICATIONS.....	6
III. PROJECT BUDGET	6
A. CONSTRUCTION COST ESTIMATE (CCE)	6
B. CURRENT WORKING ESTIMATE (CWE)	6
C. CONSULTANT’S FEES	7
IV. PROJECT SCHEDULE	7
A. SCOPE OF WORK DESIGN & CONSTRUCTION SCHEDULE	7
B. CONSULTANT’S PROPOSED DESIGN & CONSTRUCTION SCHEDULE	8
C. CONSULTANT DESIGN SCHEDULE	8
D. BID DOCUMENT CONSTRUCTION SCHEDULE	8
E. CONTRACTOR CONSTRUCTION PROGRESS SCHEDULE	9
V. PROJECT SITE LOCATION & TEAM MEMBERS.....	9
A. PROJECT SITE ADDRESS	9
B. PROJECT TEAM MEMBER DIRECTORY	9
1. DPMC Representative:	10
2. Client Agency Representative.....	10
VI. PROJECT DEFINITION	10
A. BACKGROUND	10
B. FUNCTIONAL DESCRIPTION OF THE BUILDING.....	10
VII. CONSULTANT DESIGN RESPONSIBILITIES.....	11
A. DESIGN REQUIREMENTS	11
1. General.....	11
2. New Conference Room Construction	11
3. HVAC Space Planning Analysis	11
4. Electrical	12
5. Fire Protection.....	12
B. GENERAL DESIGN OVERVIEW	12
1. Design Detail:	12
2. Specification Format:.....	13

3.	Submittal Schedule:	13
4.	Construction Cost Estimates:	13
C.	PROJECT COMMENCEMENT	14
1.	Project Directory:	14
2.	Site Access:	14
3.	Project Coordination:	14
4.	Existing Documentation:	14
5.	Scope of Work:	15
6.	Project Schedule:	15
D.	BUILDING & SITE INFORMATION.....	15
1.	Building Classification:	15
2.	Building Block & Lot Number:	15
3.	Building Site Plan:	15
4.	Site Location Map:.....	16
E.	DESIGN MEETINGS & PRESENTATIONS.....	16
1.	Design Meetings:	16
2.	Design Presentations:.....	16
F.	CONSTRUCTION BID DOCUMENT SUBMITTAL	17
VIII. CONSULTANT CONSTRUCTION RESPONSIBILITIES		17
A.	GENERAL CONSTRUCTION ADMINISTRATION OVERVIEW	17
B.	PRE-BID MEETING	17
C.	POST BID REVIEW MEETING, RECOMMENDATION FOR AWARD	17
1.	Post Bid Review:.....	17
2.	Review Meeting:.....	18
3.	Substitutions:.....	18
4.	Schedule:.....	18
5.	Performance:	19
6.	Letter of Recommendation:	19
7.	Conformed Drawings:.....	19
D.	DIRECTOR’S HEARING	19
E.	CONSTRUCTION JOB MEETINGS, SCHEDULES, LOGS.....	20
1.	Meetings:.....	20
2.	Schedules:	20
3.	Submittal Log:	20
F.	CONSTRUCTION SITE ADMINISTRATION SERVICES.....	21
G.	SUB-CONSULTANT PARTICIPATION.....	22
H.	DRAWINGS	22
1.	Shop Drawings:.....	22
2.	As-Built & Record Set Drawings:	22
I.	CONSTRUCTION DEFICIENCY LIST	23
J.	INSPECTIONS: SUBSTANTIAL & FINAL COMPLETION	23
K.	CLOSE-OUT DOCUMENTS	23

L.	CLOSE-OUT ACTIVITY TIME.....	23
M.	TESTING, TRAINING, MANUALS AND ATTIC STOCK	24
1.	Testing:	24
2.	Training:.....	24
3.	Operation & Maintenance Manuals:.....	24
4.	Attic Stock:	25
N.	CHANGE ORDERS	25
1.	Consultant:	25
2.	Contractor:	25
3.	Recommendation for Approval:	26
4.	Code Review:.....	26
5.	Cost Estimate:	26
6.	Time Extension:.....	27
7.	Submission:.....	27
8.	Meetings:.....	27
9.	Consultant Fee:	27
IX.	PERMITS & APPROVALS.....	28
A.	NJ UNIFORM CONSTRUCTION CODE PERMIT	28
1.	Prior Approval Certification Letters:	28
2.	Multi-building or Multi-site Permits:.....	29
3.	Special Inspections:	29
B.	OTHER REGULATORY AGENCY PERMITS, CERTIFICATES AND APPROVALS.....	29
C.	STATE INSURANCE APPROVAL	30
D.	PUBLIC EMPLOYEES OCCUPATIONAL SAFETY & HEALTH PROGRAM.....	30
E.	PERMIT MEETINGS.....	30
F.	MANDATORY NOTIFICATIONS	31
G.	CONSULTANT FEE.....	31
X.	GENERAL REQUIREMENTS	31
A.	SCOPE CHANGES	31
B.	ERRORS AND OMISSIONS.....	31
C.	ENERGY INCENTIVE PROGRAM	31
XI.	ALLOWANCES	32
A.	PERMIT FEE ALLOWANCE	32
1.	Permits:	32
2.	Permit Costs:.....	32
3.	Applications:	32
4.	Consultant Fee:	32
XII.	SUBMITTAL REQUIREMENTS.....	33

PROJECT NAME: F&A Building – Conference Room Installation
PROJECT LOCATION: NJDOT HQ, Ewing, NJ
PROJECT NO: T0630-00
DATE: February 24, 2020

A. CONTRACT DELIVERABLES 33
B. CATALOG CUTS 33
C. PROJECT DOCUMENT BOOKLET 33
D. DESIGN DOCUMENT CHANGES 33
E. SINGLE-PRIME CONTRACT 33

XIII. SOW SIGNATURE APPROVAL SHEET..... 35

XIV. CONTRACT DELIVERABLES 36

XV. EXHIBITS..... 41

A. SAMPLE PROJECT SCHEDULE FORMAT
B. PROJECT SITE LOCATION MAP
C. STUDY BY GANNETT FLEMING
D. PHOTOS

I. OBJECTIVE

The objective of this project is to complete construction of a new stand-alone conference room on the third floor of the DOT Finance & Administration (F&A) Building that will be 420 square feet in area and can accommodate thirty people. An evaluation of the mechanical, plumbing, electrical, lighting and fire alarm system will be required to ensure code compliance and energy efficiency.

II. CONSULTANT QUALIFICATIONS

A. CONSULTANT & SUB-CONSULTANT PRE-QUALIFICATIONS

The Consultant shall be a firm pre-qualified with the Division of Property Management & Construction (DPMC) in the following discipline(s):

- **P001 Architecture**

The Consultant shall also have in-house capabilities or Sub-Consultants pre-qualified with DPMC in:

- **P002 Electrical Engineering**
- **P003 HVAC Engineering**
- **P004 Plumbing Engineering**
- **P010 Fire Protection Engineering**

As well as, **any and all** other Architectural, Engineering and Specialty Disciplines necessary to complete the project as described in this Scope of Work (SOW).

III. PROJECT BUDGET

A. CONSTRUCTION COST ESTIMATE (CCE)

The initial Construction Cost Estimate (CCE) for this project is \$84,000

The Consultant shall review this Scope of Work and provide a narrative evaluation and analysis of the accuracy of the proposed project CCE in their technical proposal based on their professional experience and opinion.

B. CURRENT WORKING ESTIMATE (CWE)

The Current Working Estimate (CWE) for this project is \$123,480

The CWE includes the construction cost estimate and all consulting, permitting and administrative fees.

The CWE is the Client Agency’s financial budget based on this project Scope of Work and shall not be exceeded during the design and construction phases of the project unless DPMC approves the change in Scope of Work through a Contract amendment.

C. CONSULTANT’S FEES

The construction cost estimate for this project *shall not* be used as a basis for the Consultant’s design and construction administration fees. The Consultant’s fees shall be based on the information contained in this Scope of Work document and the observations made and/or the additional information received during the pre-proposal meeting.

IV. PROJECT SCHEDULE

A. SCOPE OF WORK DESIGN & CONSTRUCTION SCHEDULE

The following schedule identifies the estimated design and construction phases for this project and the estimated durations.

PROJECT PHASE	ESTIMATED DURATION (Calendar Days)
1. Site Access Approvals & Schedule Design Kick-off Meeting	14
2. Design Development Phase	50% (Minimum)
• <i>Project Team & DPMC Plan/Code Unit Review & Comment</i>	14
3. Final Design Phase	100%
• <i>Project Team & DPMC Plan/Code Unit Review & Approval</i>	14
4. Final Design Re-Submission to Address Comments	7
• <i>Project Team & DPMC Plan/Code Unit Review & Approval</i>	14
5. Permit Application Phase	7
• <i>Issue Plan Release</i>	
6. Bid Phase	42
7. Award Phase	28
8. Construction Phase	90

B. CONSULTANT’S PROPOSED DESIGN & CONSTRUCTION SCHEDULE

The Consultant shall submit a project design and construction bar chart schedule with their technical proposal that is similar in format and detail to the schedule depicted in **Exhibit ‘A’**. The bar chart schedule developed by the Consultant shall reflect their recommended project phases, phase activities, activity durations.

The Consultant shall estimate the duration of the project Close-Out Phase based on the anticipated time required to complete each deliverable identified in Section XIV of this document entitled “Contract Deliverables - Project Close-Out Phase” and include this information in the bar chart schedule submitted.

A written narrative shall also be included with the technical proposal explaining the schedule submitted and the reasons why and how it can be completed in the time frame proposed by the Consultant.

This schedule and narrative will be reviewed by the Consultant Selection Committee as part of the evaluation process and will be assigned a score commensurate with clarity and comprehensiveness of the submission.

C. CONSULTANT DESIGN SCHEDULE

Based on the Notice to Proceed, Consultant shall update their approved schedule and shall distribute it at the design kickoff meeting. Note that this schedule shall be submitted in both paper format and on compact disk in a format compatible with *Microsoft Project*. This schedule will be binding for the Consultant’s activities and will include the start and completion dates for each design activity. The Consultant and Project Team members shall use this schedule to ensure that all design milestone dates are being met for the project. The Consultant shall update the schedule to reflect performance periodically (minimally at each design phase) for the Project Team review and approval. Any recommendations for deviations from the approved design schedule must be explained in detail as to the causes for the deviation(s) and impact to the schedule.

D. BID DOCUMENT CONSTRUCTION SCHEDULE

The Consultant shall include a construction schedule in Division 1 of the specification bid document. This schedule shall contain, at minimum, the major activities and their durations for each trade specified for the project. This schedule shall be in “bar chart” format and will be used by the Contractors as an aid in determining their bid price. It shall reflect special sequencing or phased construction requirements including, but not limited to: special hours for building access, weather restrictions, imposed constraints caused by Client Agency program schedules, security

needs, lead times for materials and equipment, anticipated delivery dates for critical items, utility interruption and shut-down constraints, and concurrent construction activities of other projects at the site and any other item identified by the Consultant during the design phases of the project.

E. CONTRACTOR CONSTRUCTION PROGRESS SCHEDULE

The Contractor shall be responsible for preparing a coordinated combined progress schedule with the Sub-Contractors after the award of the contract. This schedule shall meet all of the requirements identified in the Consultant’s construction schedule. The construction schedule shall be completed in accordance with the latest edition of the Instructions to Bidders and General Conditions and Bulletins that may be issued on the project.

The Consultant must review and analyze this progress schedule and recommend approval/disapproval to the Project Team until a satisfactory version is approved by the Project Team. The Project Team must approve the baseline schedule prior to the start of construction and prior to the Contractor submitting invoices for payment.

The Consultant shall note in Division 1 of the specification that the State will not accept the progress schedule until it meets the project contract requirements and any delays to the start of the construction work will be against the Contractor until the date of acceptance by the State.

The construction progress schedule shall be reviewed, approved, and updated by the Contractor, Consultant, and Project Team members at each regularly scheduled construction job meeting and the Consultant shall note the date and trade(s) responsible for project delays (as applicable).

V. PROJECT SITE LOCATION & TEAM MEMBERS

A. PROJECT SITE ADDRESS

The location of the project site is:

NJ Department of Transportation Headquarters
Finance & Administration Building
1035 Parkway Ave
Trenton, New Jersey 08625-0600

See **Exhibit ‘B’** for the project site location map.

B. PROJECT TEAM MEMBER DIRECTORY

The following are the names, addresses, and phone numbers of the Project Team members.

1. DPMC Representative:

Name: Cristina Zozzaro, Project Design Manager
Address: Division Property Management & Construction
20 West State Street, 3rd Floor
Trenton, NJ 08608-1206
Phone No: (609) 777 – 4273
E-Mail No: Cristina.Zozzaro@treas.nj.gov

2. Client Agency Representative

Name: Hani Shamroukh, Project Manager
Address: NJ Department of Transportation
1035 Parkway Ave
Ewing Township, NJ 08618
Phone No: 609-963-1341
E-Mail No: Hani.Shamroukh@dot.nj.gov

VI. PROJECT DEFINITION

A. BACKGROUND

The DOT Ewing Headquarters Campus is the largest of the DOT facilities within the State. It provides workspace for approximately 1,950 employees and is comprised of several buildings ranging in age from 23 years to over 80 years old. The total square footage of the buildings in the complex is 861,274 square feet.

Heating for F&A is supplied by a hydronic heating plant located in the basement of the building. The cooling is supplied by a centralized chilled water system based in the Central plant building which also provides cooling for the Main Office Building (MOB) & Engineering and Operation building (E&O). Electric and gas utilities are provided by the Public Service Electric and Gas Company.

An Asbestos Analysis Test and Abatement Report will be provided to the consultant at the pre-proposal meeting. The Asbestos Analysis Test and Abatement Report was prepared by Environmental Connection INC., and dated February 10, 2017.

B. FUNCTIONAL DESCRIPTION OF THE BUILDING

The DOT F&A Building is a three (3)-story high masonry and glass structure. The building is approximately 53 years old and is connected to the south side of the MOB via an enclosed

connector. NJDOT has a need for a conference room that can serve up to 30 people on the third floor.

Gannett Fleming (GF) was selected by NJDOT to evaluate design options in terms of best use of space, energy efficiency and code compliance. The F&A 3rd Floor Conference Room Study by Gannett Fleming (GF), dated August 2019 is shown in **Exhibit ‘C’**. The New Jersey Department of Transportation (NJDOT) will implement Option B. The walls to the stand-alone conference room for this option are already in place.

The purpose of this project will specifically address the HVAC, electrical and fire alarm system issues/modifications outlined in the study as well as any other code related issues, if applicable, that may be identified.

VII. CONSULTANT DESIGN RESPONSIBILITIES

A. DESIGN REQUIREMENTS

1. General

The Consultant shall review the report by Gannett Fleming (GF) and provide construction documents to implement option ‘B’. Evaluate construction already implemented by DOT and provide design direction to complete the new conference room and ensure compliance with applicable codes.

2. New Conference Room Construction

Option ‘B’ entails building a new standalone conference room in the location shown on the plans. The ceiling grid may have to be modified to accommodate the new room.

3. HVAC Space Planning Analysis

- The Consultant shall review the recommendations listed in Option “B” and the proposed floor plan. See **Exhibit ‘C’** for the proposed Conference Room mechanical and electrical floor plan layout, and determine the extent of modification necessary with regard to air devices.
- The Consultant shall verify zoning via VAV terminal units is sufficient, and the condition of the air devices and ductwork.
- The Consultant shall prepare demolition plans and propose new work based on calculations of required airflow for the new space and for the altered open office space.
- The Consultant shall determine the necessity of new VAV Terminal Units, air supply diffusers, return air grilles and new temperature sensors on an internal wall inside the conference room. The consultant shall consider independent motion sensing light controls to optimize the functionality of the zone HVAC system.

- The Consultant shall investigate the existing HVAC system and connections between system elements before demolition and verify their functionality when the new work is finished.
- The Consultant shall try to eliminate the noise problem by ducting the return grille.

4. Electrical

The Consultant shall prepare electrical plans and documentation to show relocated light fixtures in existing ceiling grid, new data outlets, new electric receptacles on the walls, and new electric floor receptacles within the new conference room and the open office area. The consultant shall consider independent motion sensing light controls to optimize the functionality of the system.

5. Fire Protection

The Consultant shall design and prepare fire protection plans and documentation to show required fire alarm notification devices within the new conference room and the open office area. The existing manual fire alarm system consists of smoke detectors, pull down station, horn and strobe, exit and emergency lights, etc. See **Exhibit ‘D’**.

B. GENERAL DESIGN OVERVIEW

1. Design Detail:

Section VII of this Scope of Work is intended as a guide for the Consultant to understand the overall basic design requirements of the project and is not intended to identify each specific design component related to code and construction items. The Consultant shall provide those details during the design phase of the project ensuring that they are in compliance with all applicable codes, regulating authorities, and the guidelines established in the DPMC Procedures for Architects and Engineers Manual.

The Consultant shall understand that construction documents submitted to DPMC shall go beyond the basic requirements set forth by the Uniform Construction Code N.J.A.C. 5:23-2.15(f). Drawings and specifications shall provide detail beyond that required to merely show the nature and character of the work to be performed. The construction documents shall provide sufficient information and detail to illustrate, describe and clearly delineate the design intent of the Consultant and enable all Contractors to uniformly bid the project.

The Consultant shall review and comply with the DPMC “Plan Review Instructions” which can be found on DPMC’s web site at:

http://www.state.nj.us/treasury/dpvc/lists_and_publications.shtml

The Consultant shall ensure that all of the design items described in this scope of work are addressed and included in the project drawings and specification sections where appropriate.

It shall be the Consultant's responsibility to provide all of the design elements for this project. Under no circumstance may they delegate the responsibility of the design; or portions thereof, to the Contractor unless specifically allowed in this Scope of Work.

2. Specification Format:

The Consultant shall prepare the construction specifications in the Construction Specifications Institute (CSI) format entitled MasterFormat©, latest edition.

The project construction specifications shall include only those CSI MasterFormat© specification sections and divisions applicable to this specific project.

3. Submittal Schedule:

The Consultant shall include a submittal schedule in Division 1 of the specifications. The schedule (list of required submittals) shall identify the general conditions and/or specification section (number and name) and the type of submittal required (material data, product data, test results, calculations, etc.). The submittal schedule is a compilation of the submittals required on the project and is provided as an aid to the contractor.

4. Construction Cost Estimates:

The Consultant shall include with each design submittal phase identified in Paragraph IV.A, including the Permit Application Phase and Bid Phase, a detailed construction cost estimate itemized and summarized by the divisions and sections of the Construction Specification Institute (CSI) MasterFormat© latest edition applicable to the project.

The detailed breakdown of each work item shall include labor, equipment, material and total costs.

The construction estimate shall include all alternate bid items and all unit price items itemized and summarized by the divisions and sections of the specifications. All cost estimates shall be adjusted for regional location, site factors, construction phasing, premium time, building use group, location of work within the building, temporary swing space, security issues, and inflation factors based on the year in which the work is to be performed. The cost estimate shall include descriptions of all allowances and contingencies noted in the estimate.

All cost estimates must be submitted on a DPMC-38 Project Cost Analysis form at each design phase of the project supported by the detailed construction cost estimate. The Project Manager will provide cost figures for those items which may be in addition to the CCE such as art inclusion, CM services, etc. and must be included as part of the CWE. This cost analysis must be submitted for all projects regardless of the Construction Cost Estimate amount.

C. PROJECT COMMENCEMENT

A pre-design meeting shall be scheduled with the Consultant and the Project Team members at the commencement of the project to obtain and/or coordinate the following information:

1. Project Directory:

Develop a project directory that identifies the name and phone number of key designated representatives who may be contacted during the design and construction phases of this project.

2. Site Access:

Develop procedures to access the project site and provide the names and phone numbers of approved escorts when needed. Obtain copies of special security and policy procedures that must be followed during all work conducted at the facility and include this information in Division 1 of the specification.

3. Project Coordination:

Review and become familiar with any current and/or future projects at the site that may impact the design, construction, and scheduling requirements of this project. Incorporate all appropriate information and coordination requirements in Division 1 of the specification.

4. Existing Documentation:

Copies of the following documents will be provided to each Consulting firm at the pre-proposal meeting to assist in the bidding process. These drawings are not accurate and may include discrepancies compared to the actual layout. More accurate as built drawings will be provided by DOT, when balancing is done through the ESIP project.

- A1219-02: NJDOT HQ Energy Savings Improvement, dated August 1, 2016, and prepared by Concord Engineering.
- Asbestos Analysis Test and Abatement Report, dated February 10, 2017, and prepared by Environmental Connection Inc.

Review these documents and any additional information that may be provided at a later date such as reports, studies, surveys, equipment manuals, as-built drawings, etc. The State does not attest to the accuracy of the information provided and accepts no responsibility for the consequences of errors by the use of any information and material contained in the documentation provided. It shall be the responsibility of the Consultant to verify the contents and assume full responsibility for any determination or conclusion drawn from the material used. If the information provided is

insufficient, the Consultant shall take the appropriate actions necessary to obtain the additional information required.

All original documentation shall be returned to the provider at the completion of the project.

5. Scope of Work:

Review the design and construction administration responsibilities and the submission requirements identified in this Scope of Work with the Project Team members. Items such as: contract deliverables, special sequencing or phased construction requirements, special hours for construction based on Client Agency programs or building occupancy, security needs, delivery dates of critical and long lead items, utility interruptions or shut down constraints for tie-ins, weather restrictions, and coordination with other project construction activities at the site shall be addressed.

This information and all general administrative information; including a narrative summary of the work for this project, *shall be included in Division 1* of the specification. The Consultant shall assure that there are no conflicts between the information contained in Division 1 of the specification and the DPMC General Conditions.

6. Project Schedule:

Review and update the project design and construction schedule with the Project Team members.

D. BUILDING & SITE INFORMATION

The following information shall be included in the project design documents.

1. Building Classification:

Provide the building Use Group Classification and Construction Type on the appropriate design drawing.

2. Building Block & Lot Number:

Provide the site Block and Lot Number on the appropriate design drawing.

3. Building Site Plan:

Only when the project scope involves site work, or when the design triggers code issues that require site information to show code compliance, shall a site plan be provided that is drawn in accordance with an accurate boundary line survey. The site plan shall include, but not be limited to, the following as may be applicable:

- The size and location of new and existing buildings and additions as well as other structures.
- The distance between buildings and structures and to lot lines.
- Established and new site grades and contours as well as building finished floor elevations.
- New and existing site utilities, site vehicular and pedestrian roads, walkways and parking areas.

4. Site Location Map:

Provide a site location map on the drawing cover sheet that identifies the vehicular travel routes from major roadways to the project construction site and the approved access roads to the Contractor's worksite staging area.

E. DESIGN MEETINGS & PRESENTATIONS

1. Design Meetings:

Conduct the appropriate number of review meetings with the Project Team members during each design phase of the project so they may determine if the project meets their requirements, question any aspect of the contract deliverables, and make changes where appropriate. The Consultant shall describe the philosophy and process used in the development of the design criteria and the various alternatives considered to meet the project objectives. Selected studies, sketches, cost estimates, schedules, and other relevant information shall be presented to support the design solutions proposed. Special considerations shall also be addressed such as: Contractor site access limitations, utility shutdowns and switchover coordination, phased construction and schedule requirements, security restrictions, available swing space, material and equipment delivery dates, etc.

It shall also be the responsibility of the Consultant to arrange and require all critical Sub-Consultants to be in attendance at the design review meetings.

Record the minutes of each design meeting and distribute within seven (7) calendar days to all attendees and those persons specified to be on the distribution list by the Project Manager

2. Design Presentations:

The minimum number of design presentations required for each phase of this project is identified below for reference:

Design Development Phase: One (1) oral presentation at phase completion.

Final Design Phase: One (1) oral presentation at phase completion.

F. CONSTRUCTION BID DOCUMENT SUBMITTAL

In addition to submitting construction bid documents as defined in Section XIV Contract Deliverables, Consultant shall submit both specifications and drawings on compact disk (CD) in *Adobe Portable Document Format (.pdf)*.

VIII. CONSULTANT CONSTRUCTION RESPONSIBILITIES

A. GENERAL CONSTRUCTION ADMINISTRATION OVERVIEW

This section of the Scope of Work is intended as a guide for the Consultant to understand their overall basic construction administration responsibilities for the project and does not attempt to identify each specific activity or deliverable required during this phase. The Consultant shall obtain that information from the current publication of the DPMC Procedures for Architects and Engineers Manual and any additional information provided during the Consultant Selection Process.

B. PRE-BID MEETING

The Consultant shall attend, chair, record and distribute minutes of the Contractor pre-bid meetings. When bidders ask questions that may affect the bid price of the project, the Consultant shall develop a Bulletin(s) to clarify the bid documents in the format described in the Procedures for Architects and Engineers Manual, Section 9.2 entitled “Bulletins.” These Bulletins must be sent to DPMC at least seven (7) calendar days prior to the bid opening date. DPMC will then distribute the document to all bidders.

C. POST BID REVIEW MEETING, RECOMMENDATION FOR AWARD

The Consultant; in conjunction with the Project Manager, shall review the bid proposals submitted by the various Contractors to determine the low responsible bid for the project. The Consultant; in conjunction with the Project Manager and Project Team members, shall develop a post bid questionnaire based on the requirements below and schedule a post bid review meeting with the Contractor’s representative to review the construction costs and schedule, staffing, and other pertinent information to ensure they understand the Scope of the Work and that their bid proposal is complete and inclusive of all requirements necessary to deliver the project in strict accordance with the plans and specifications.

1. Post Bid Review:

Review the project bid proposals including the alternates, unit prices, and allowances within seven (7) calendar days from the bid due date. Provide a bid tabulation matrix comparing all bids submitted and make a statement about the high, low, and average bids received. Include a

comparison of the submitted bids to the approved current construction cost estimate. When applicable, provide an analysis with supporting data, detailing why the bids did not meet the construction cost estimate.

2. Review Meeting:

Arrange a meeting with the apparent low bid Contractor to discuss their bid proposal and other issues regarding the award of the contract. Remind the Contractor that this is a Lump Sum bid. Request the Contractor to confirm that their bid proposal does not contain errors. Review and confirm Alternate pricing and Unit pricing and document acceptance or rejection as appropriate.

Comment on all omissions, qualifications and unsolicited statements appearing in the proposals. Review any special circumstances of the project. Ensure the Contractor's signature appears on all post bid review documents.

3. Substitutions:

Inquire about any potential substitutions being contemplated by the Contractor and advise them of the State's guidelines for the approval of substitutions and the documentation required. Review the deadline and advise the Contractor that partial submissions are not acceptable. Submission after the deadline may be rejected by the State.

Equal substitutions that are proposed by the Contractor that are of lesser value must have a credit change order attached with the submittal (See Article 4.7.5 "Substitutions" of the General Conditions). The State has the right to reject the submission if there is no agreement on the proposed credit. Contractor will be responsible to submit a specified item.

4. Schedule:

Confirm that the Contractor is aware of the number of calendar days listed in the contract documents for the project duration and that the Contractor's bid includes compliance with the schedule duration and completion dates. Particular attention shall be given to special working conditions, long lead items and projected delivery dates, etc. Review project milestones (if applicable). This could give an indication of Contractor performance, but not allow a rejection of the bid.

Review the submittal timeframes per the Contract documents. Ask the Contractor to identify what products will take over twenty-eight (28) calendar days to deliver from the point of submittal approval.

If a CPM Schedule is required, review the provisions and have Contractor acknowledge the responsibility. Ask for the name of the CPM Scheduler and the "ballpark" costs.

5. Performance:

Investigate the past performance of Contractor by contacting Architects and owners (generally three of each) that were listed in their DPMC pre-qualification package or other references that may have been provided. Inquire how the Contractor performed with workmanship, schedule, project management, change orders, cooperation, paper work, etc.

6. Letter of Recommendation:

The Consultant shall prepare a Letter of Recommendation for contract award to the Contractor submitting the lowest responsible bid within three (3) calendar days from the post bid review meeting. The document shall contain the project title, DPMC project number, bid due date and expiration date of the proposal. It shall include a detailed narrative describing each post bid meeting agenda item identified above and a recommendation to award the contract to the apparent low bid Contractor based on the information obtained during that meeting. Describe any acceptance or rejection of Alternate pricing and Unit pricing.

Comment on any discussion with the Contractor that provides a sense of their understanding of the project and any special difficulties that they see, and how they might approach those problems.

Attach all minutes of the Post bid meeting and any other relevant correspondence with the Letter of Recommendation and submit them to the Project Manager.

7. Conformed Drawings:

The Consultant shall prepare and distribute two (2) sets of drawings stamped “Conformed Drawings” to the Project Manager that reflect all Bulletins and/or required changes, additions, and deletions to the pertinent drawings within fourteen (14) calendar days of the construction contract award date.

Any changes made in Bulletins, meeting minutes, post bid review requirements shall also be reflected in the specification.

D. DIRECTOR’S HEARING

The Consultant must attend any Director’s hearing(s) if a Contractor submits a bid protest. The Consultant shall be present to interpret the intent of the design documents and answer any technical questions that may result from the meeting. In cases where the bid protest is upheld, the Consultant shall submit a new “Letter of Recommendation” for contract award. The hours required to attend the potential hearings and to document the findings shall be estimated by the Consultant and the costs will be included in the base bid of their fee proposal.

E. CONSTRUCTION JOB MEETINGS, SCHEDULES, LOGS

The Consultant shall conduct all of the construction job meetings, to be held bi-weekly for the duration of construction, in accordance with the procedures identified in the A/E manual and those listed below.

1. Meetings:

The Consultant and Sub-Consultant(s) shall attend the pre-construction meeting and all construction job meetings during the construction phase of the project. The Consultant shall chair the meeting, transcribe and distribute the job-meeting minutes for every job meeting to all attendees and to those persons specified to be on the distribution list by the Project Manager. The Agenda for the meeting shall include, but not be limited to the items identified in the Procedures for Architects and Engineers Manual, Section 10.3.1, entitled “Agenda.”

Also, the Consultant is responsible for the preparation and distribution of minutes within three (3) calendar days of the meeting. The format to be used for the minutes shall comply with those identified in the “Procedures for Architects and Engineers Manual,” Section 10.3.4, entitled, “Format of Minutes.” All meeting minutes are to have an “action” column indicating the party that is responsible for the action indicated and a deadline to accomplish the assigned task. These tasks must be reviewed at each job progress meeting until it is completed and the completion date of each task shall be noted in the minutes of the meeting following the task completion.

2. Schedules:

The Consultant; with the input from the Client Agency Representative and Project Manager, shall review and recommend approval of the project construction schedule prepared by the Contractor. The schedule shall identify all necessary start and completion dates of construction, construction activities, submittal process activities, material deliveries and other milestones required to give a complete review of the project.

The Consultant shall record any schedule delays, the party responsible for the delay, the schedule activity affected, and the original and new date for reference.

The Consultant shall ensure that the Contractor provides a two (2) week “look ahead” construction schedule based upon the current monthly updated schedule as approved at the bi-weekly job meetings and that identifies the daily planned activities for that period. This Contractor requirement must also be included in Division 1 of the specification for reference.

3. Submittal Log:

Based on the Submittal Schedule in Division 1 of the specifications, the Consultant shall develop and implement a submittal log that includes all of the required project submittals as identified in

the general conditions and technical specifications. The submittal log shall be provided to the contractor at the pre-construction meeting. The dates of submission shall be determined and approved by all affected parties during the pre-construction meeting.

Examples of the submissions to be reviewed and approved by the Consultant and Sub-Consultant (if required) include: project schedule, schedule of values, shop drawings, equipment and material catalog cuts, spec sheets, product data sheets, MSDS material safety data sheets, specification procedures, color charts, material samples, mock-ups, etc. The submittal review process must be conducted at each job progress meeting and shall include the Consultant, Sub-Consultant, Contractor, Project Manager, and designated representatives of the Client Agency.

The Consultant shall provide an updated submittal log at each job meeting that highlights the status of all required submissions.

F. CONSTRUCTION SITE ADMINISTRATION SERVICES

The Consultant and Sub-Consultant(s) shall provide construction site administration services during the duration of the project. The Consultant and Sub-Consultant(s) do not necessarily have to be on site concurrently if there are no critical activities taking place that require the Sub-Consultant's participation.

The services required shall include, but not be limited to; field observations sufficient to verify the quality and progress of construction work, conformance and compliance with the contract documents, and to attend/chair meetings as may be required by the Project Manager to resolve special issues.

Consultant and Sub-Consultant(s) shall conduct weekly site inspection/field observation visits. Site inspection/field observation visits may be conducted in conjunction with regularly scheduled bi-weekly construction job meetings, depending on the progress of work, for weeks that construction job meetings are scheduled. The Consultant and their Sub-Consultant(s) shall submit a field observation report for each site inspection to the Project Manager within three (3) calendar days of the site visit. Also, they shall conduct inspections during major construction activities including, but not limited to the following examples: concrete pours, steel and truss installations, code inspections, final testing of systems, achievement of each major milestone required on the construction schedule, and requests from the Project Manager. The assignment of a full time on-site Sub-Consultant does not relieve the Consultant of their site visit obligation.

The Consultant shall refer to Section XIV. Contract Deliverables of this Scope of Work subsection entitled "Construction Phase" to determine the extent of services and deliverables required during this phase of the project.

G. SUB-CONSULTANT PARTICIPATION

It is the responsibility of the Consultant to ensure that they have provided adequate hours and/or time allotted in their technical proposal so that their Sub-Consultants may participate in all appropriate phases and activities of this project or whenever requested by the Project Manager. This includes the pre-proposal site visit and the various design meetings and construction job meetings, site visits, and close-out activities described in this Scope of Work. Field observation reports and/or meeting minutes are required to be submitted to the Project Manager within three (3) calendar days of the site visit or meeting. All costs associated with such services shall be included in the base bid of the Consultant's fee proposal.

H. DRAWINGS

1. Shop Drawings:

Each Contractor shall review the specifications and determine the numbers and nature of each shop drawing submittal. Five (5) sets of the documents shall be submitted with reference made to the appropriate section of the specification. The Consultant shall review the Contractor's shop drawing submissions for conformity with the construction documents within seven (7) calendar days of receipt. The Consultant shall return each shop drawing submittal stamped with the appropriate action, i.e. "Approved", "Approved as Noted", "Approved as Noted Resubmit for Records", "Rejected", etc.

2. As-Built & Record Set Drawings:

The Contractor(s) shall keep the contract drawings up-to-date at all times during construction and upon completion of the project, submit their AS-BUILT drawings to the Consultant with the Contractor(s) certification as to the accuracy of the information prior to final payment. All AS-BUILT drawings submitted shall be entitled AS-BUILT above the title block and dated.

The Consultant shall review the Contractor(s)' AS-BUILT drawings at each job progress meeting to ensure that they are up-to-date. Any deficiencies shall be noted in the progress meeting minutes.

The Consultant shall acknowledge acceptance of the AS-BUILT drawings by signing a transmittal indicating they have reviewed them and that they reflect the AS-BUILT conditions as they exist.

Upon receipt of the AS-BUILT drawings from the Contractor(s), the Consultant shall obtain the original reproducible drawings from DPMC and transfer the AS-BUILT conditions to the original full sized signed reproducible drawings to reflect RECORD conditions within fourteen (14) calendar days of receipt of the AS-BUILT information.

The Consultant shall note the following statement on the original RECORD-SET drawings. "The AS-BUILT information added to this drawing(s) has been supplied by the Contractor(s). The

Architect/Engineer does not assume the responsibility for its accuracy other than conformity with the design concept and general adequacy of the AS-BUILT information to the best of the Architect's/Engineer's knowledge."

Upon completion, The Consultant shall deliver the RECORD-SET original reproducible drawings to DPMC who will acknowledge their receipt in writing. This hard copy set of drawings and two (2) sets of current release AUTO CAD discs shall be submitted to DPMC. The discs shall contain all AS-BUILT drawings in both ".dwg" (native file format for AUTO CAD) and ".pdf" (*Adobe* portable document format) file formats.

I. CONSTRUCTION DEFICIENCY LIST

The Consultant shall prepare, maintain and continuously distribute an on-going deficiency list to the Contractor, Project Manager, and Client Agency Representative during the construction phase of the project. This list shall be separate correspondence from the field observation reports and shall not be considered as a punch list.

J. INSPECTIONS: SUBSTANTIAL & FINAL COMPLETION

The Consultant and their Sub-Consultant(s) accompanied by the Project Manager, Code Inspection Group, Client Agency Representative and Contractor shall conduct site inspections to determine the dates of substantial and final completion. The Project Manager will issue the only recognized official notice of substantial completion. The Consultant shall prepare and distribute the coordinated punch list, written warranties and other related DPMC forms and documents, supplied by the Contractor, to the Project Manager for review and certification of final contract acceptance.

If applicable, the punch list shall include a list of attic stock and spare parts.

K. CLOSE-OUT DOCUMENTS

The Consultant shall review all project close-out documents as submitted by the Contractors to ensure that they comply with the requirements listed in the "Procedure for Architects and Engineers' Manual." The Consultant shall forward the package to the Project Manager within fourteen (14) calendar days from the date the Certificate of Occupancy/Certificate of Approval is issued. The Consultant shall also submit a letter certifying that the project was completed in accordance with the contract documents, etc.

L. CLOSE-OUT ACTIVITY TIME

The Consultant shall provide all activities and deliverables associated with the "Close-Out Phase" of this project as part of their Lump Sum base bid. The Consultant and/or Sub-

Consultant(s) may not use this time for additional job meetings or extended administrative services during the Construction Phase of the project.

M. TESTING, TRAINING, MANUALS AND ATTIC STOCK

The Consultant shall ensure that all equipment testing, training sessions and equipment manuals required for this project comply with the requirements identified below.

1. Testing:

All equipment and product testing conducted during the course of construction is the responsibility of the Contractor. However, the Consultant shall ensure the testing procedures comply with manufacturers recommendations. The Consultant shall review the final test reports and provide a written recommendation of the acceptance/rejection of the material, products or equipment tested within seven (7) calendar days of receipt of the report.

2. Training:

The Consultant shall include in the specification that the Contractor shall schedule and coordinate all equipment training with the Project Manager and Client Agency representatives. It shall state that the Contractor shall submit the Operation and Maintenance (O&M) manuals, training plan contents, and training durations to the Consultant, Project Manager and Client Agency Representative for review and approval prior to the training session.

The Consultant shall ensure that the training session is video recorded by the Contractor. A copy of the recording shall be transmitted to the Project Manager on compact disk who will forward the material to the Client Agency for future reference.

All costs associated with the training sessions shall be borne by the Contractor installing the equipment. A signed letter shall be prepared stating when the training was completed and must be accompanied with the training session sign-in sheet as part of the project close-out package.

3. Operation & Maintenance Manuals:

The Consultant shall coordinate and review the preparation and issuance of the equipment manuals provided by the Contractor(s) ensuring that they contain the operating procedures, maintenance procedures and frequency, cut sheets, parts lists, warranties, guarantees, and detailed drawings for all equipment installed at the facility.

A troubleshooting guide shall be included that lists problems that may arise, possible causes with solutions, and criteria for deciding when equipment shall be repaired and when it must be replaced.

Include a list of the manufacturer’s recommended spare parts for all equipment being supplied for this project.

A list of names, addresses and telephone numbers of the Contractors involved in the installations and firms capable of performing services for each mechanical item shall be included. The content of the manuals shall be reviewed and approved by the Project Manager and Client Agency Representative.

The Consultant shall include in the specification that the Contractor must provide a minimum of ten (10) “throwaway” copies of the manual for use at the training seminar and seven (7) hardbound copies as part of the project close-out package.

4. Attic Stock:

The Consultant shall determine and recommend whether “attic stock” should be included for all aspects of the project. If required, the Consultant shall specify attic stock items to be included in the project.

Prior to project close-out, the Consultant must prepare a comprehensive listing of all items for delivery by the Contractor to the Owner and in accordance with the appropriate specification/plan section. Items shall include, but not be limited to: training sessions, O&M manuals, as-built drawings, itemized attic stock requirements, and manufacturer guarantees/warranties.

N. CHANGE ORDERS

The Consultant shall review and process all change orders in accordance with the contract documents and procedures described below.

1. Consultant:

The Consultant shall prepare a detailed request for Change Order including a detailed description of the change(s) along with appropriate drawings, specifications, and related documentation and submit the information to the Contractor for the change order request submission. This will require the use of the current DPMC 9b form.

2. Contractor:

The Contractor shall submit a DPMC 9b Change Order Request form to the Project Manager within seven (7) calendar days after receiving the Change Order from the Consultant. The document shall identify the changed work in a manner that will allow a clear understanding of the necessity for the change. Copies of the original design drawings, sketches, etc. and specification pages shall be highlighted to clarify and show entitlement to the Change Order.

Copies shall be provided of job minutes or correspondence with all relative information highlighted to show the origin of the Change Order. Supplementary drawings from the Consultant shall be included if applicable that indicate the manner to be used to complete the changed work. A detailed breakdown of all costs associated with the change, i.e. material, labor, equipment, overhead, Sub-Contractor work, profit and bond, and certification of increased bond shall be provided.

If the Change Order will impact the time of the project, the Contractor shall include a request for an extension of time. This request shall include a copy of the original approved project schedule and a proposed revised schedule that reflects the impact on the project completion date. Documentation to account for the added time requested shall be included to support entitlement of the request such as additional work, weather, other Contractors, etc. This documentation shall contain dates, weather data and all other relative information.

3. Recommendation for Approval:

The Consultant shall evaluate the reason for the change in work and provide a detailed written recommendation for approval or disapproval of the Change Order Request including backup documentation of costs in CSI format and all other considerations to substantiate that decision.

4. Code Review:

The Consultant shall determine if the Change Order request will require Code review and shall submit six (6) sets of signed and sealed modified drawings and specifications to the DPMC Plan & Code Review Unit for approval, if required. The Consultant must also determine and produce a permit amendment request if required.

5. Cost Estimate:

The Consultant shall provide a detailed cost estimate of the proposed Change Order Request, as submitted by the Contractor, in CSI format (latest edition) for all appropriate divisions and sub-divisions using a recognized estimating formula. The estimate shall then be compared with that of the Contractor's estimate. If any line item in the Consultant's estimate is lower than the corresponding line item in the Contractor's estimate, the Consultant in conjunction with the Project Manager is to contact the Contractor by telephone and negotiate the cost differences. The Consultant shall document the negotiated agreement on the Change Order Request form. If the Contractor's total dollar value changes based on the negotiations, the Consultant shall identify the changes on the Change Order Request form accordingly.

When recommending approval or disapproval of the change order, the Consultant shall be required to prepare and process a Change Order package that contains at a minimum the following documents:

- DPMC 9b Change Order Request
- DPMC 10 Consultant’s Evaluation of Contractor’s Change Order Request
- Consultant’s Independent Detailed Cost Estimate
- Notes of Negotiations

6. Time Extension:

When a Change Order Request is submitted with both cost and time factors, the Consultant’s independent cost estimate is to take into consideration time factors associated with the changed work. The Consultant is to compare their time element with that of the Contractor’s time request and if there is a significant difference, the Consultant in conjunction with the Project Manager is to contact the Contractor by telephone and negotiate the difference.

When a Change Order Request is submitted for time only, the Consultant is to do an independent evaluation of the time extension request using a recognized scheduling formula.

Requests for extension of contract time must be done in accordance with the General Conditions Article 10.1 “Changes in the Work”.

7. Submission:

The Consultant shall complete all of the DPMC Change Order Request forms provided and submit a completed package to the Project Manager with all appropriate backup documentation within seven (7) calendar days from receipt of the Contractor’s change order request. The Consultant shall resubmit the package at no cost to the State if the change order package contents are deemed insufficient by the Project Manager.

8. Meetings:

The Consultant shall attend and actively participate at all administrative hearings or settlement conferences as may be called by Project Manager in connection with such Change Orders and provide minutes of those meetings to the Project Manager for distribution.

9. Consultant Fee:

All costs associated with the potential Contractor Change Order Requests shall be anticipated by the Consultant and included in the base bid of their fee proposal.

If the Client Agency Representative requests a scope change; and it is approved by the Project Manager, the Consultant may be entitled to be reimbursed through an amendment and in accordance with the requirements stated in paragraph 10.01 of this Scope of Work.

IX. PERMITS & APPROVALS

A. NJ UNIFORM CONSTRUCTION CODE PERMIT

The project construction documents must comply with the latest adopted edition of the NJ Uniform Construction Code (NJUCC).

The latest NJUCC Adopted Codes and Standards can be found at:

<http://www.state.nj.us/dca/divisions/codes/codreg/>

The Consultant shall complete the NJUCC permit application and all applicable technical sub-code sections with all technical site data required. The Agent section of the application and certification section of the building sub-code section shall be signed. These documents shall be forwarded to the DPMC Project Manager.

The Consultant may obtain copies of all NJUCC permit applications at the following website:

<http://www.state.nj.us/dca/divisions/codes/forms/>

All other required project permits shall be obtained and paid for by the Consultant in accordance with the procedures described in Paragraph IX.B.

1. Prior Approval Certification Letters:

The issuance of a construction permit for this project may be contingent upon acquiring various “prior approvals” as defined by N.J.A.C. 5:23-1.4. It is the Consultant’s responsibility to determine which prior approvals, if any, are required. The Consultant shall submit a general certification letter to the DPMC Plan & Code Review Unit Manager during the Permit Phase of this project that certifies all required prior approvals have been obtained.

In addition to the general certification letter discussed above, the following specific prior approval certification letters, where applicable, shall be submitted by the Consultant to the DPMC Plan & Code Review Unit Manager: Soil Erosion & Sediment Control, Water & Sewer Treatment Works Approval, Coastal Areas Facilities Review, Compliance of Underground Storage Tank Systems with N.J.A.C. 7:14B, Pinelands Commission, Highlands Council, Well Construction and Maintenance; Sealing of Abandoned Wells with N.J.A.C. 7:9D, Certification that all utilities have been disconnected from structures to be demolished, Board of Health Approval for Potable Water Wells, Health Department Approval for Septic Systems. It shall be noted that in accordance with N.J.A.C. 5:23-2.15(a)5, a permit cannot be issued until the letter(s) of certification is received.

2. Multi-building or Multi-site Permits:

A project that involves many buildings and/or sites requires that a separate permit shall be issued for each building or site. The Consultant must determine the construction cost estimate for *each* building and/or site location and submit that amount where indicated on the permit application.

3. Special Inspections:

In accordance with the requirements of the New Jersey Uniform Construction Code N.J.A.C. 5:23-2.20(b), Bulletin 03-5 and Chapter 17 of the International Building Code, the Consultant shall be responsible for the coordination of all special inspections during the construction phase of the project.

Bulletin 03-5 can be found at:

http://www.state.nj.us/dca/divisions/codes/publications/pdf_bulletins/b_03_5.pdf

a. Definition:

Special inspections are defined as an independent verification by a certified Special Inspector for **Class I buildings and smoke control systems in any class building**. The special inspector is to be independent from the Contractor and responsible to the Consultant so that there is no possible conflict of interest.

Special inspectors shall be certified in accordance with the requirements in the New Jersey Uniform Construction Code.

b. Responsibilities:

The Consultant shall submit with the permit application, a list of special inspections and the agencies or special inspectors that will be responsible to carry out the inspections required for the project. The list shall be a separate document, on letter head, signed and sealed.

B. OTHER REGULATORY AGENCY PERMITS, CERTIFICATES AND APPROVALS

The Consultant shall identify and obtain all other State Regulatory Agency permits, certificates, and approvals that will govern and affect the work described in this Scope of Work. An itemized list of these permits, certificates, and approvals shall be included with the Consultant's Technical Proposal and the total amount of the application fees should be entered in the Fee Proposal line item entitled, "**Permit Fee Allowance.**"

The Consultant may refer to the Division of Property Management and Construction “Procedures for Architects and Engineers Manual”, Section 6.4.8, which presents a compendium of State permits, certificates, and approvals that may be required for this project.

The Consultant shall determine the appropriate phase of the project to submit the permit application(s) in order to meet the approved project milestone dates.

Where reference to an established industry standard is made, it shall be understood to mean the most recent edition of the standard unless otherwise noted. If an industry standard is found to be revoked, or should the standard have undergone substantial change or revision from the time that the Scope of Work was developed, the Consultant shall comply with the most recent edition of the standard.

C. STATE INSURANCE APPROVAL

The Consultant shall respond in writing to the FM Global Insurance Underwriter plan review comments through the DPMC Plan & Code Review Unit Manager as applicable. The Consultant shall review all the comments and, with agreement of the Project Team, modify the documents while adhering to the project’s SOW requirements, State code requirements, schedule, budget, and Consultant fee.

D. PUBLIC EMPLOYEES OCCUPATIONAL SAFETY & HEALTH PROGRAM

A paragraph shall be included in the design documents, if applicable to this project that states: The Contractor shall comply with all the requirements stipulated in the Public Employees Occupational Safety & Health Program (PEOSHA) document, paragraph 12:100-13.5 entitled “Air quality during renovation and remodeling”. The Contractor shall submit a plan demonstrating the measures to be utilized to confine the dust, debris, and air contaminants in the renovation or construction area of the project site to the Project Team prior to the start of construction.

The link to the document is:

<http://www.nj.gov/health/workplacehealthandsafety/peosh/peosh-health-standards/iaq.shtml>

E. PERMIT MEETINGS

The Consultant shall attend and chair all meetings with Permitting Agencies necessary to explain and obtain the required permits.

F. MANDATORY NOTIFICATIONS

The Consultant shall include language in Division 1 of the specification that states the Contractor shall assure compliance with the New Jersey “One Call” Program (1-800-272-1000) if any excavation is to occur at the project site.

The One Call Program is known as the “New Jersey Underground Facility Protection Act”, refer to N.J.A.C. 14:2.

G. CONSULTANT FEE

The Consultant shall determine the efforts required to complete and submit all permit applications, obtain and prepare supporting documentation, attend meetings, etc., and include the total cost in the base bid of their fee proposal under the “Permit Phase”.

X. GENERAL REQUIREMENTS

A. SCOPE CHANGES

The Consultant must request any changes to this Scope of Work in writing. An approved DPMC 9c Consultant Amendment Request form reflecting authorized scope changes must be received by the Consultant prior to undertaking any additional work. The DPMC 9c form must be approved and signed by the Director of DPMC and written authorization issued from the Project Manager prior to any work being performed by the Consultant. Any work performed without the executed DPMC 9c form is done at the Consultant’s own financial risk.

B. ERRORS AND OMISSIONS

The errors and omissions curve and the corresponding sections of the “Procedures for Architects and Engineers Manual” are eliminated. All claims for errors and omissions will be pursued by the State on an individual basis. The State will review each error or omission with the Consultant and determine the actual amount of damages, if any, resulting from each negligent act, error or omission.

C. ENERGY INCENTIVE PROGRAM

The Consultant shall review the programs described on the “New Jersey’s Clean Energy Program” website at: <http://www.njcleanenergy.com> to determine if any proposed upgrades to the mechanical and/or electrical equipment and systems for this project qualify for “New Jersey Clean Energy Program” rebates and incentives such as SmartStart, Pay4Performance, Direct Install or any other incentives.

The Consultant shall be responsible to complete the appropriate registration forms and applications, provide any applicable worksheets, manufacturer’s specification sheets, calculations, attend meetings, and participate in all activities with designated representatives of the programs and utility companies to obtain the entitled financial incentives and rebates for this project. All costs associated with this work shall be estimated by the Consultant and the amount included in the base bid of their fee proposal.

XI. ALLOWANCES

A. PERMIT FEE ALLOWANCE

The Consultant shall obtain and pay for all of the project permits in accordance with the guidelines identified below.

1. Permits:

The Consultant shall determine the various permits, certificates, and approvals required to complete this project.

2. Permit Costs:

The Consultant shall estimate the application fee costs for all of the required project permits, certificates, and approvals (excluding the NJ Uniform Construction Code permit) and include that amount in their fee proposal line item entitled “**Permit Fee Allowance**”, refer to Paragraph IX.A. A breakdown of each permit and application fee shall be attached to the fee proposal for reference.

NOTE: The NJ Uniform Construction Code permit is excluded since it will be paid for by the State.

3. Applications:

The Consultant shall complete and submit all permit applications to the appropriate permitting authorities and the costs shall be paid from the Consultant’s permit fee allowance. A copy of the application(s) and the original permit(s) obtained by the Consultant shall be given to the DPMC Project Manager for distribution during construction.

4. Consultant Fee:

The Consultant shall determine what is required to complete and submit the permit applications, obtain supporting documentation, attend meetings, etc., and include the total cost in the base bid of their fee proposal under the “Permit Phase” column.

Any funds remaining in the permit allowance will be returned to the State at the close of the project.

XII. SUBMITTAL REQUIREMENTS

A. CONTRACT DELIVERABLES

All submissions shall include the Contract Deliverables identified in Section XIV of this Scope of Work and described in the DPMC Procedures for Architects and Engineers Manual.

B. CATALOG CUTS

The Consultant shall provide catalog cuts as required by the DPMC Plan & Code Review Unit during the design document review submissions. Examples of catalog cuts include, but are not limited to: mechanical equipment, hardware devices, plumbing fixtures, fire suppression and alarm components, specialized building materials, electrical devices, etc.

C. PROJECT DOCUMENT BOOKLET

The Consultant shall submit all of the required Contract Deliverables to the Project Manager at the completion of each phase of the project. All reports, meeting minutes, plan review comments, project schedule, cost estimate in CSI format (latest edition), correspondence, calculations, and other appropriate items identified on the Submission Checklist form provided in the A/E Manual shall be presented in an 8½” x 11” bound “booklet” format.

D. DESIGN DOCUMENT CHANGES

Any corrections, additions, or omissions made to the submitted drawings and specifications at the Permit Phase of the project must be submitted to DPMC Plan & Code Review Unit as a complete document. Corrected pages or drawings may not be submitted separately unless the Consultant inserts the changed page or drawing in the original documents. No Addendums or Bulletins will be accepted as a substitution to the original specification page or drawing.

E. SINGLE-PRIME CONTRACT

All references to “separate contracts” in the Procedures for Architects and Engineers Manual, Chapter 8, shall be deleted since this project will be advertised as a “Single Bid” (Lump Sum All Trades) contract. The single prime Contractor will be responsible for all work identified in the drawings and specifications.

PROJECT NAME: F&A Building – Conference Room Installation
PROJECT LOCATION: NJDOT HQ, Ewing, NJ
PROJECT NO: T0630-00
DATE: February 24, 2020

The drawings shall have the required prefix designations and the specification sections shall have the color codes as specified for each trade in the DPMC Procedure for Architects and Engineers Manual.

The Consultant must still develop the Construction Cost Estimate (CCE) for each trade and the amount shall be included on the DPMC-38 Project Cost Analysis form where indicated. This document shall be submitted at each design phase of the project and updated immediately prior to the advertisement to bid.


PROJECT NAME: F&A Building – Conference Room Installation
PROJECT LOCATION: NJDOT HQ, Ewing, NJ
PROJECT NO: T0630-00
DATE: February 24, 2020

XIII. SOW SIGNATURE APPROVAL SHEET

This Scope of Work shall not be considered a valid document unless all signatures appear in each designated area below.

The Client Agency approval signature on this page indicates that they have reviewed the design criteria and construction schedule described in this project Scope of Work and verifies that the work will not conflict with the existing or future construction activities of other projects at the site.

SOW PREPARED BY:  2/24/2020
DOAA ABUELELA, PROJECT MANAGER DATE
DPMC PROJECT PLANNING & INITIATION

SOW APPROVED BY:  2/24/2020
JAMES WRIGHT, MANAGER DATE
DPMC PROJECT PLANNING & INITIATION

SOW APPROVED BY:  03/03/20
MICHAEL DeANGELO, MANAGER DATE
NJ DEPARTMENT OF TRANSPORTATION

SOW APPROVED BY:  2/24/20
CRISTINA ZOZZARO, DESIGN PROJECT MANAGER DATE
DPMC PROJECT MANAGEMENT GROUP

SOW APPROVED BY:  3/5/20
RICHARD FLODMAND, DEPUTY DIRECTOR DATE
DIV PROPERTY MGT & CONSTRUCTION

XIV. CONTRACT DELIVERABLES

The following is a listing of Contract Deliverables that are required at the completion of each phase of this project. The Consultant shall refer to the DPMC publication entitled, “Procedures for Architects and Engineers,” Volumes I and II, 2nd Edition, dated January, 1991 to obtain a more detailed description of the deliverables required for each item listed below.

The numbering system used in this “Contract Deliverables” section of the scope of work corresponds to the numbering system used in the “Procedures for Architects and Engineers” manual and some may have been deleted if they do not apply to this project.

DESIGN DEVELOPMENT PHASE: 50% Complete Design Documents (Minimum)

- 7.1 Project Schedule (Update Bar Chart Schedule)**
- 7.2 Meetings & Minutes (Minutes within seven (7) calendar days of meeting)**
- 7.3 Correspondence**
- 7.4 Submission Requirements**
 - 7.4.1 A/E Statement of Site Visit, As-Built Drawing Verification (if available)
 - 7.4.2 Space Analysis & Program Requirements.
 - 7.4.3 Special Features Description: communications, fire protection, etc.
 - 7.4.8 Regulatory Agency Approvals
 - 7.4.10 Drawings: 6 sets
 - Cover Sheet (See A/E Manual for format)
 - Floor Plans
 - Sections/Details
 - HVAC Drawings, Heating & Cooling Equipment Schedules
 - Fire Protection Drawings,
 - Electrical Drawings, Lighting Design
 - 7.4.11 Specifications: 6 sets (See A/E Manual for format, include Division 1 and edit to describe the administrative and general requirements of the project)
 - 7.4.12 Current Working Estimate in CSI Format & Cost Analysis 38 Form
 - 7.4.13 Bar Chart of Design and Construction Schedule
 - 7.4.14 Oral Presentation of Submission to Project Team
 - 7.4.15 SOW Compliance Statement
 - 7.4.16 This Submission Checklist (See A/E Manual, Figure 6.4.16 for format)
 - 7.4.17 Deliverables Submission in Booklet Form: 6 sets

7.5 Approval

7.5.1 Respond to Submission Comments

7.6 Submission Forms

Figure 7.4.12 Current Working Estimate/Cost Analysis

Figure 7.4.16 Submission Checklist

FINAL DESIGN PHASE 100% Complete Construction Documents

This Final Design Phase may require more than one submission based on the technical quality and code conformance of the design documents.

8.1 Schedule (Update Bar Chart Schedule)

8.2 Meeting & Minutes (Minutes within seven (7) calendar days of meeting)

8.3 Correspondence

8.4 Submission Requirements

8.4.1 A/E Statement of Site Visit

8.4.2 Space Analysis

8.4.3 Special Features Description, Communication/Fire/Smoke/Exhaust)

8.4.8 Regulatory Agency Approvals (Include itemized list specific to this project)

8.4.10 Drawings: 6 sets

8.4.11 Specifications: 6 sets

8.4.12 Current Working Estimate in CSI Format & Cost Analysis 38 Form

8.4.13 Bar Chart of Design and Construction Schedule

8.4.14 Oral Presentation of this Submission to Project Team

8.4.15 Plan Review/SOW Compliance Statement

8.4.16 This Submission Checklist

8.4.17 Deliverables Submission in Booklet Form: 6 sets

8.5 Approvals

8.5.1 Respond to Submission Comments

PERMIT APPLICATION PHASE

This Permit Application Phase should not include any additional design issues. Design documents shall be 100% complete at the Final Design Phase.

8.6 Permit Application Submission Requirements

- 8.6.1 - 8.6.7: If all of the deliverables of these sections have been previously submitted to DPMC and approved there are no further deliverables due at this time
- 8.6.8 Regulatory Agency Approvals
 - (a) UCC Permit Application & Technical Sub-codes completed by A/E
- 8.6.9 Utility Availability Confirmation
- 8.6.10 Signed and Sealed Drawings: 6 sets
- 8.6.11 Signed and Sealed Specifications: 6 sets
- 8.6.12 Current Working Estimate/Cost Analysis
- 8.6.13 Bar Chart Schedule
- 8.6.14 Project Presentation (N/A this Project)
- 8.6.15 Plan Review/SOW Compliance Statement
- 8.6.16 Submission Checklist

8.7 Approvals

8.8 Submission Forms

- Figure 8.4.12 Current Working Estimate/Cost Analysis
- Figure 8.4.16 Submission Checklist (Final Review Phase)
- Figure 8.6.12-b Bid Proposal Form (Form DPMC -3)
- Figure 8.6.12-c Notice of Advertising (Form DPMC -31)
- Figure 8.6.16 Submission Checklist (Permit Phase)
- Figure 8.7 Bid Clearance Form (Form DPMC -601)

BIDDING AND CONTRACT AWARD

9.0 Bidding Phase Requirements

- 9.01 Original Drawings signed & sealed by A/E and drawings on compact disk (CD) in *Adobe Portable Document Format (.pdf)*
- 9.02 One Unbound Specification Color Coded per A/E Manual Section 8.4.11 and specifications on compact disk (CD) in *Adobe Portable Document Format (.pdf)*
- 9.03 Bid Documents Checklist
- 9.04 Bid Proposal Form
- 9.05 Notice for Advertising

9.1 Chair Pre-Bid Conference/Mandatory Site Visit

9.2 Prepare Bulletins

9.3 Attend Bid Opening

9.4 Recommendation for Contract Award

9.4.1 Prepare Letter(s) of Recommendation for Award & Cost Analysis

9.5 Attend Post Bid Review Meeting(s)

9.6 Submission Checklist

9.7 Submission Forms

Figure 9.4.1 Cost Analysis
Figure 9.6 Submission Checklist

CONSTRUCTION PHASE

10.1 Site Construction Administration

10.2 Pre-Construction Meeting

10.3 Construction Job Meetings

10.3.1 Agenda: Schedule and Chair Construction Job Meetings
10.3.2 Minutes: Prepare and Distribute Minutes within 5 working days of meeting
10.3.3 Schedules; Approve Contractors' Schedule & Update
10.3.4 Minutes Format: Prepare Job Meeting Minutes in approved format, figure 10.3.4-a

10.4 Correspondence

10.5 Prepare and Deliver Conformed Drawings

10.7 Approve Contractors Invoicing and Payment Process

10.8 Approve Contractors 12/13 Form for Subs, Samples and Materials

10.10 Approve Test Reports

10.11 Approve Shop Drawings

10.12 Construction Progress Schedule

10.12.1 Construction Progress Schedule

10.13 Review & Recommend or Reject Change Orders

- 10.13.1 Scope Changes
- 10.13.2 Construction Change Orders
- 10.13.3 Field Changes

10.14 Construction Photographs

10.15 Submit Field Observation Reports

10.16 Submission Forms

- Figure 10.3.4-a Job Meeting Format of Minutes
- Figure 10.3.4-b Field Report
- Figure 10.6 DPMC Insurance Form-24
- Figure 10.6-a Unit Schedule Breakdown
- Figure 10.6-b Monthly Estimate for Payment to Contractor DPMC 11-2
- Figure 10.6-c Monthly Estimate for Payment to Contractor DPMC 11-2A
- Figure 10.6-d Invoice DPMC 11
- Figure 10.6-e Prime Contractor Summary of Stored Materials DPMC 11-3
- Figure 10.6-f Agreement & Bill of Sale certificate for Stored Materials DPMC 3A
- Figure 10.7-a Approval Form for Subs, Samples & Materials DPMC 12
- Figure 10.7-b Request for Change Order DPMC 9b
- Figure 10.9 Transmittal Form DPMC 13
- Figure 10.10 Submission Checklist

PROJECT CLOSE-OUT PHASE

11.1 Responsibilities: Plan, Schedule and Execute Close-Out Activities

11.2 Commencement: Initiate Close-Out w/DPMC 20A Project Close-Out Form

11.3 Develop Punch List & Inspection Reports

11.4 Verify Correction of Punch List Items

11.5 Determination of Substantial Completion

11.6 Ensure Issuance of “Temporary Certificate of Occupancy or Approval”

11.7 Initiation of Final Contract Acceptance Process

11.8 Submission of Close-Out Documentation

- 11.8.1 As-Built & Record Set Drawings, 3 sets AUTOCAD Discs Delivered to DPMC
- 11.8.2 (a) Maintenance and Operating manuals, Warranties, etc.: 6 sets each
 - (b) Guarantees
 - (c) Shop Drawings
 - (d) Letter of Contract Performance
- 11.8.3 Final Cost Analysis-Insurance Transfer DPMC 25
- 11.8.4 This Submission Checklist

11.9 Final Payment

- 11.9.1 Contractors Final Payment
- 11.9.2 A/E Invoice and Close-Out Forms for Final Payment

11.10 Final Performance Evaluation of the A/E and the Contractors

11.11 Ensure Issuance of a “Certificate of Occupancy or Approval”

11.12 Submission Forms

- Figure 11.2 Project Close-Out Documentation List DPMC 20A
- Figure 11.3-a Certificate of Substantial Completion DPMC 20D
- Figure 11.3-b Final Acceptance of Consultant Contract DPMC 20C
- Figure 11.5 Request for Contract Transition Close-Out DPMC 20X
- Figure 11.7 Final Contract Acceptance Form DPMC 20
- Figure 11.8.3-a Final Cost Analysis
- Figure 11.8.3-b Insurance Transfer Form DPMC 25
- Figure 11.8.4 Submission Checklist

XV. EXHIBITS

The attached exhibits in this section will include a sample project schedule, and any supporting documentation to assist the Consultant in the design of the project such as maps, drawings, photographs, floor plans, studies, reports, etc.

END OF SCOPE OF WORK

February 7, 1997
Rev.: January 29, 2002

Responsible Group Code Table

The codes below are used in the schedule field "GRP" that identifies the group responsible for the activity. The table consists of groups in the Division of Property Management & Construction (DPMC), as well as groups outside of the DPMC that have responsibility for specific activities on a project that could delay the project if not completed in the time specified. For reporting purposes, the groups within the DPMC have been defined to the supervisory level of management (i.e., third level of management, the level below the Associate Director) to identify the "functional group" responsible for the activity.

<u>CODE</u>	<u>DESCRIPTION</u>	<u>REPORTS TO ASSOCIATE DIRECTOR OF:</u>
CM	Contract Management Group	Contract Management
CA	Client Agency	N/A
CSP	Consultant Selection and Prequalification Group	Technical Services
A/E	Architect/Engineer	N/A
PR	Plan Review Group	Technical Services
CP	Construction Procurement	Planning & Administration
CON	Construction Contractor	N/A
FM	Financial Management Group	Planning & Administration
OEU	Office of Energy and Utility Management	N/A
PD	Project Development Group	Planning & Administration

EXHIBIT 'A'

Activity ID	Description	Rspn	Weeks
<PROJ>			
Design			
CV3001	Schedule/Conduct Pre-design/Project Kick-Off Mtg.	CM	
CV3020	Prepare Program Phase Submittal	AE	
CV3021	Distribute Program Submittal for Review	CM	
CV3027	Prepare & Submit Project Cost Analysis (DPMC-38)	CM	
CV3022	Review & Approve Program Submittal	CA	
CV3023	Review & Approve Program Submittal	PR	
CV3024	Review & Approve Program Submittal	CM	
CV3025	Consolidate & Return Program Submittal Comments	CM	
CV3030	Prepare Schematic Phase Submittal	AE	
CV3031	Distribute Schematic Submittal for Review	CM	
CV3037	Prepare & Submit Project Cost Analysis (DPMC-38)	CM	
CV3032	Review & Approve Schematic Submittal	CA	
CV3033	Review & Approve Schematic Submittal	PR	
CV3034	Review & Approve Schematic Submittal	CM	
CV3035	Consolidate & Return Schematic Submittal Comment	CM	
CV3040	Prepare Design Development Phase Submittal	AE	
CV3041	Distribute D. D. Submittal for Review	CM	
CV3047	Prepare & Submit Project Cost Analysis (DPMC-38)	CM	
CV3042	Review & Approve Design Development Submittal	CA	
CV3043	Review & Approve Design Development Submittal	PR	
CV3044	Review & Approve Design Development Submittal	CM	
CV3045	Consolidate & Return D.D. Submittal Comments	CM	
CV3050	Prepare Final Design Phase Submittal	AE	
CV3051	Distribute Final Design Submittal for Review	CM	
CV3052	Review & Approve Final Design Submittal	CA	
CV3053	Review & Approve Final Design Submittal	PR	
CV3054	Review Final Design Submit for Constructability	OCS	

DBCA - TEST

Sheet 1 of 3

Bureau of Design & Construction Services
Routine Project

Exhibit "A"

NOTE:
Refer to section "IV Project Schedule" of the
Scope of Work for contract phase durations.

© Primavera Systems, Inc.

Activity ID	Description	Respn	Weeks
CV2055	Review & Approve Final Design Submittal	CM	
CV2056	Consolidate & Return Final Design Comments	CM	
CV3060	Prepare & Submit Permit Application Documents	AE	
CV3068	Prepare & Submit Bidding Cost Analysis (DPMC-38)	CM	
Plan Review-Permit Acquisition			
CV4001	Review Constr. Documents & Secure UCC Permit	PR	
CV4010	Provide Funding for Construction Contracts	CA	
CV4020	Secure Bid Clearance	CM	
Advertise-Bid-Award			
CV5001	Advertise Project & Bid Construction Contracts	CP	
CV5010	Open Construction Bids	CP	
CV5011	Evaluate Bids & Prep. Recommendation for Award	CM	
CV5012	Evaluate Bids & Prep. Recommendation for Award	AE	
CV5014	Complete Recommendation for Award	CP	
CV5020	Award Construction Contracts/Issue NTP	CP	
Construction			
CV6000	Project Construction Start/Issue NTP	CM	
CV6001	Contract Start/Contract Work (25%) Complete	CON	
CV6002	Preconstruction Meeting	CM	
CV6003	Begin Preconstruction Submittals	CON	
CV6004	Longest Lead Procurement Item Ordered	CON	
CV6005	Lead Time for Longest Lead Procurement Item	CON	
CV6006	Prepare & Submit Shop Drawings	CON	
CV6007	Complete Construction Submittals	CON	
CV6011	Roughing Work Start	CON	
CV6012	Perform Roughing Work	CON	
CV6010	Contract Work (50%+) Complete	CON	
CV6013	Longest Lead Procurement Item Delivered	CON	
CV6020	Contract Work (75%) Complete	CON	

Sheet 2 of 3

**Bureau of Design & Construction Services
Routine Project**

Exhibit 'A'

DRCA - TEST

NOTE:
Refer to section "IV Project Schedule" of the
Scope of Work for contract phase durations.

© Primavera Systems, Inc.

Activity ID	Description	Respn	Weeks
CV6014	Roughing Work Complete	CON	
CV6021	Interior Finishes Start	CON	
CV6022	Install Interior Finishes	CON	
CV6030	Contract Work to Substantial Completion	CON	
CV6031	Substantial Completion Declared	CM	
CV6075	Complete Deferred Punch List/Seasonal Activities	CON	
CV6079	Project Construction Complete	CM	
CV6080	Close Out Construction Contracts	CM	
CV6089	Construction Contracts Complete	CM	
CV6090	Close Out A/E Contract	CM	
CV6092	Project Completion Declared	CM	

DBCA - TEST


Sheet 3 of 3

Bureau of Design & Construction Services
Routine Project

Exhibit 'A'

NOTE:
Refer to section "IV Project Schedule" of the
Scope of Work for contract phase durations.

© Primavera Systems, Inc.

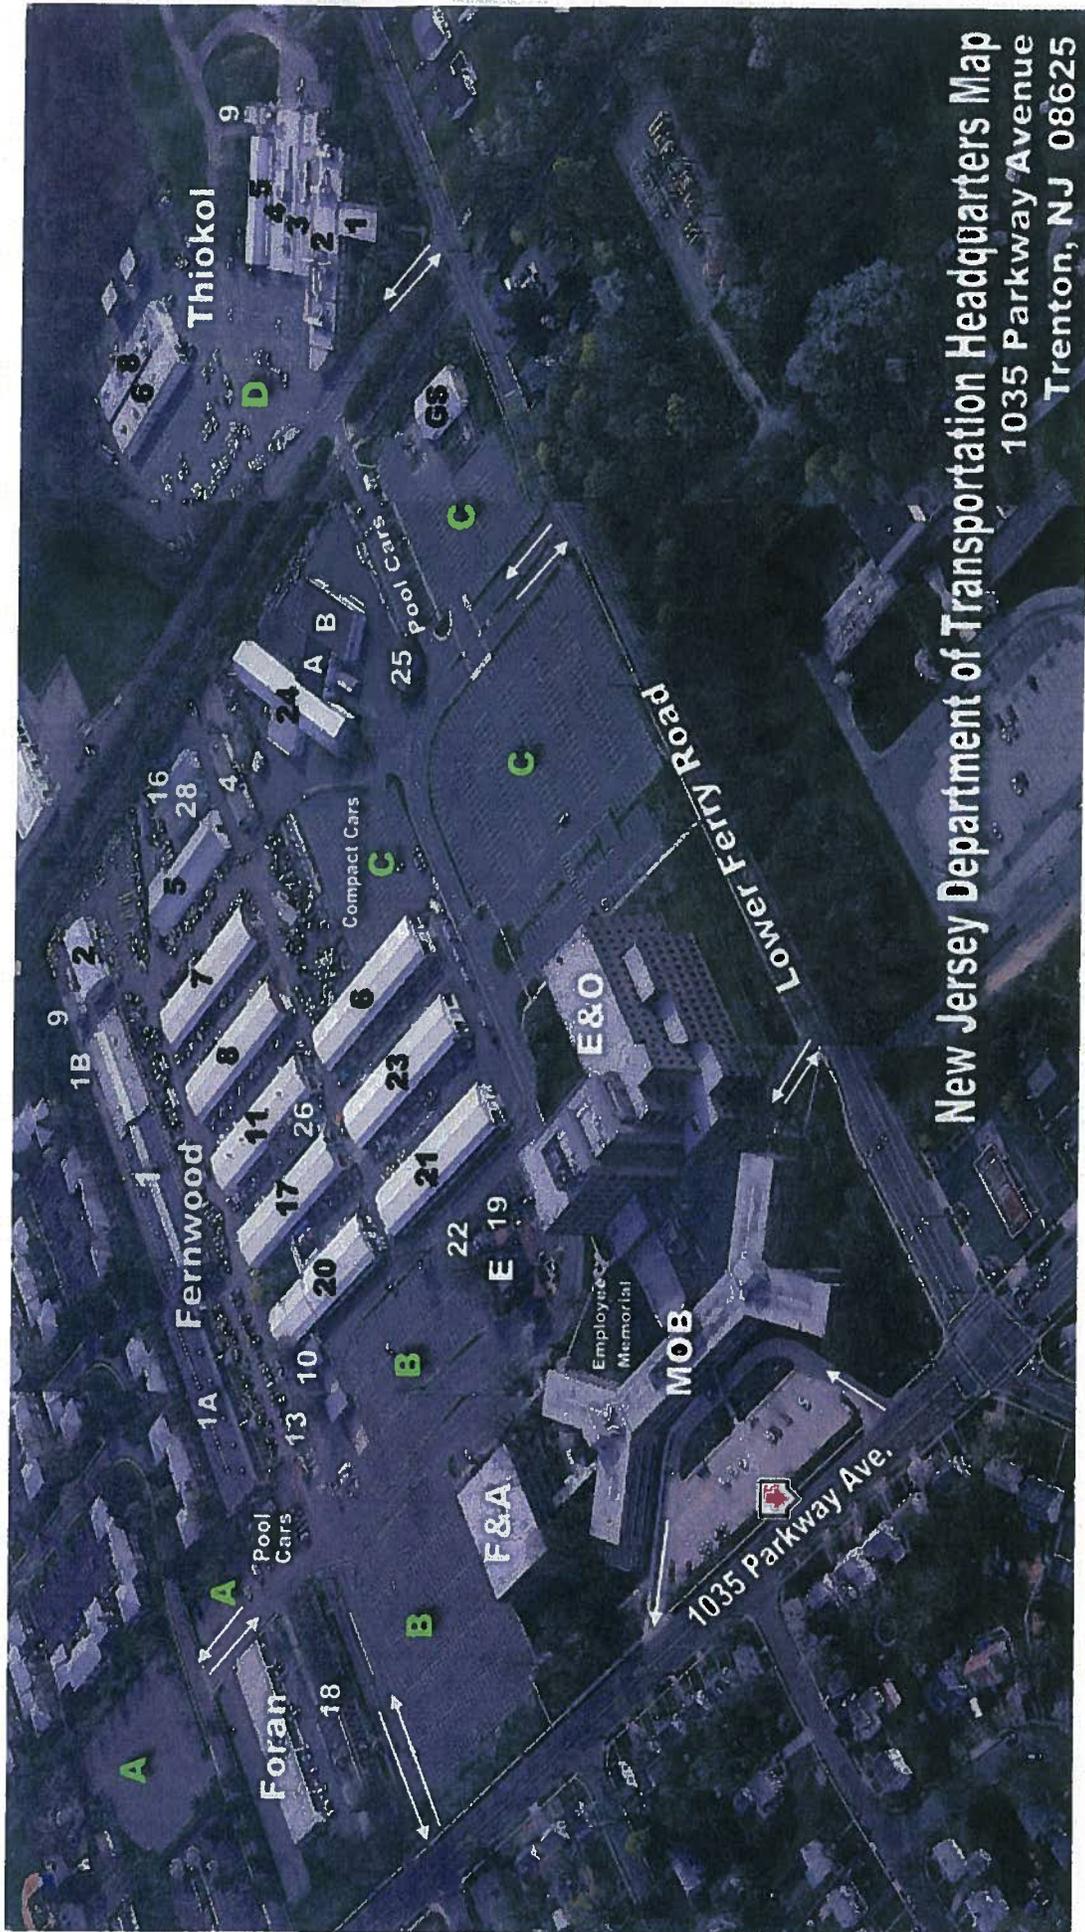

New Jersey Department of Transportation Headquarters Map
 1035 Parkway Avenue
 Trenton, NJ 08625

Fernwood Complex

- Building E - Central Steam Plant
- Building 1 - Equipment Office/car & Truck Shop
- Building 1A - Mower/Machine Shop
- Building 1B - Storage
- Building 2 - Plow Shop
- Building 4 - Plant Maintenance Shop
- Building 5 - Storage
- Building 6 - Furniture Storage & Overhead Sign Crew
- Building 7 - Equipment Receiving
- Building 8 - Pavement Management/Records Storage
- Building 9 - Vehicle Wash Building
- Building 10 - Vehicle Gas & Natural Gas Stations
- Building 11 - Inspection Shop
- Building 13 - Guard House

Thiokol Complex

- Building 16 - Soils Building/Emergency Mgt. & Storage
- Building 17 - Construction Shop
- Building 18 - Vacant Building
- Building 19 - Plant Maintenance
- Building 20 - Central Electrical Operations/Radio Shop
- Building 21 - Sign Shop
- Building 22 - Switch Gear
- Building 23 - Overhead Sign Crew
- Building 24 - Warehouse Stock Room
- Annex A - Department of Health
- Annex B - Criminal Justice
- Building 25 - Criminal Justice
- Building 26 - Body Shop
- Building 28 - BES Artifacts

F&A

- Building 1 - Vacant
- Building 2 - Bituminous & Chemistry Labs
- Building 3 - Materials Testing Lab
- Building 4 - Physical Testing Lab
- Building 5 - Storage
- Building 6 - Accident Records/MVC/NJSP Fatal Unit
- Building 8 - Print Shop
- Building 9 - Concrete testing
- CS - Geodetic Survey

MOB

- Building 1 - Main Office Building
- Building 2 - Engineering & Operations
- Building 3 - Finance & Administration

*Map Created and
 Maintained by
 The Web Development Unit
 Division of IT*

EXHIBIT "B"

DEPARTMENT OF TRANSPORTATION HEADQUARTERS, WEST TRENTON, NEW JERSEY

New Jersey
 Department of Transportation
 Ewing Complex
 1035 Parkway Avenue
 Trenton, NJ 08625
 Created by the Division of IT
 3/6/01


THIOKOL BUILDINGS

- Bldg. 1 Bureau of Materials Office
- Bldg. 2 Bituminous Lab & Chemistry Lab
- Bldg. 3 Materials Testing Lab
- Bldg. 4 Physical Testing Lab
- Bldg. 5 Storage
- Bldg. 6 Accident Records & Geodetic Survey Offices & Sale of Plans/Triangle
- Bldg. 8 Print Shop
- Bldg. 9 Concrete Testing

FERNWOOD BUILDINGS

- Bldg. E Central Steam Plant
- Bldg. 1 Equipment Office/Car & Truck Shop
- Bldg. 1A Mower / Machine Shop
- Bldg. 2 Plow Shop
- Bldg. 4 Plant Maintenance Shops
- Bldg. 5 Storage
- Bldg. 6 Furniture Storage
- Bldg. 7 Equipment Receiving
- Bldg. 8 Pavement Management/Furniture Shop
- Bldg. 9 Vehicle Wash Building
- Bldg. 10 Vehicle (Gas & Natural Gas) Stations
- Bldg. 11 Inspection Shop
- Bldg. 13 Guard House
- Bldg. 16 Soils Building & Maintenance Storage
- Bldg. 17 Construction Shop
- Bldg. 18 Vacant Building
- Bldg. 19 Scale Prototype and Development
- Bldg. 20 Central Electrical Operations/ Radio Shop
- Bldg. 21 Sign Shop
- Bldg. 22 Switch Gear
- Bldg. 23 Overhead Sign Crew
- Bldg. 24 DOT/DMV Warehouse/Stock Room
- Bldg. 25 Landscape Chemical Storage
- Bldg. 26 Body Shop
- Bldg. 28 Storage

- MOB Main Office Building
- E&O Engineering & Operations Building
- F&A Finance and Administration Building

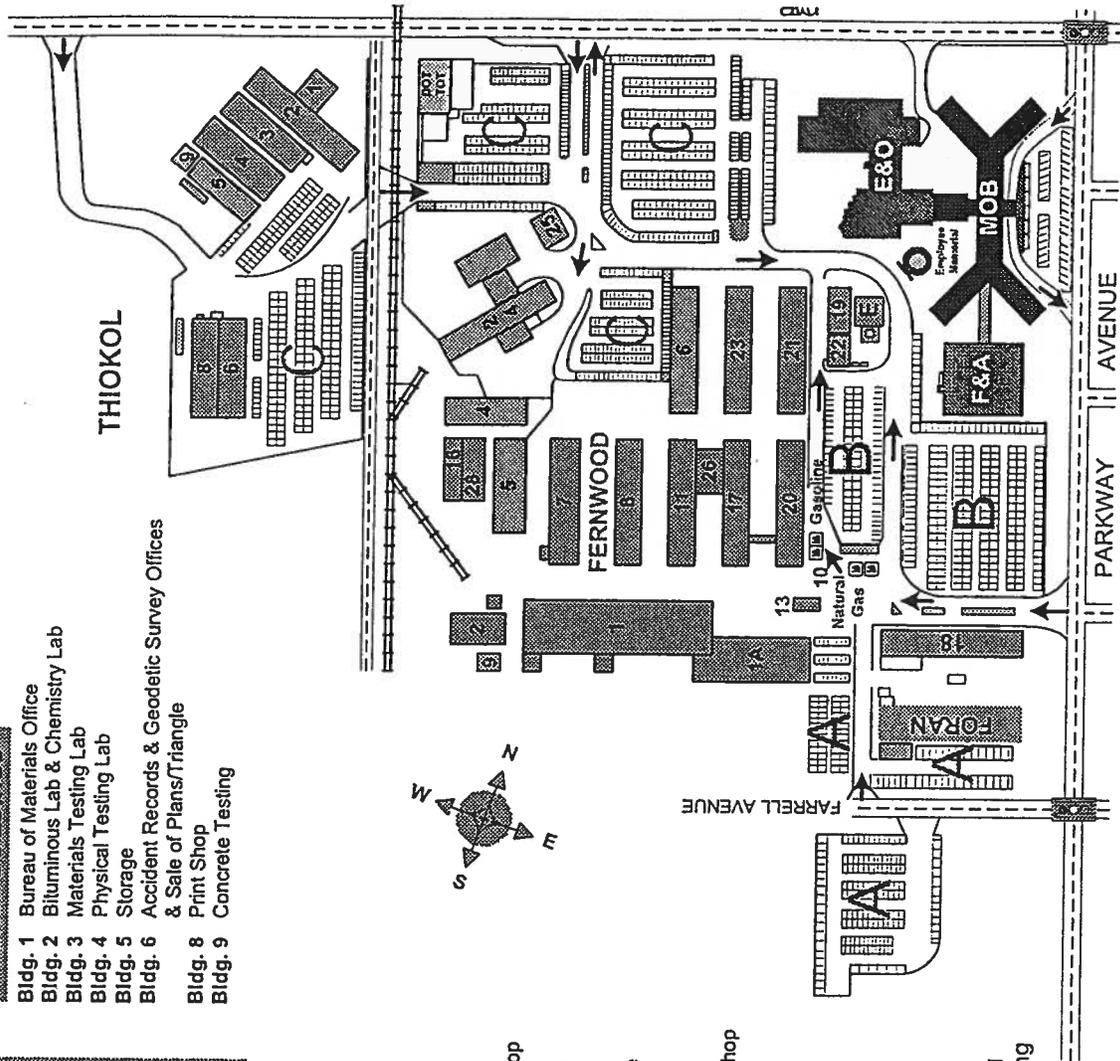

DIRECTIONS: Take Route 29 North to Parkside Avenue, follow Parkside Avenue five traffic lights to Parkway Avenue. Make a left onto Parkway Avenue, after second traffic light and before the third traffic light at Lower Ferry Road, make a left in the DOT Administration Building Parking Lot. (NOTE: DOT is located on the corner of Parkway Avenue and Lower Ferry Road).

EXHIBIT 'B'

**Land and Building Asset Management System
Building List With Square Footage
Grouped By Facility, Sorted By Building Name**

November 05, 2009

<u>Building Name</u>	<u>Bldg ID</u>	<u>Occupancy Type</u>	<u>County</u>	<u>Municipality</u>	<u>Block</u>	<u>Lot</u>	<u>Square Footage</u>
Facility Name - Ewing Headquarters							
Land ID - 9263							
Ewing Headquarters Office Trailers	4236	Office Buildings (Finished, SI	Mercer	Ewing Twp.	00322	00001	2,880.00
Ewing Headquarters Thiokol Bldg. # 1 - Materials Office	1485	Office Buildings (Finished, SI	Mercer	Ewing Twp.	00322	00001	7,520.00
Ewing Headquarters Thiokol Bldg. # 2 - Bituminous / Chemical Lab	4252	Office Buildings (Finished, SI	Mercer	Ewing Twp.	00322	00001	18,400.00
Ewing Headquarters Thiokol Bldg. # 3 - Materials Testing Lab	1486	Office Buildings (Finished, SI	Mercer	Ewing Twp.	00322	00001	8,500.00
Ewing Headquarters Thiokol Bldg. # 4 - Physical Testing Laboratory	4251	Office Buildings (Finished, SI	Mercer	Ewing Twp.	00322	00001	19,500.00
Ewing Headquarters Thiokol Bldg. # 5 - Storage	4292	Metal Buildings	Mercer	Ewing Twp.	00322	00001	6,450.00
Ewing Headquarters Thiokol Bldg. # 6 - Office Building	4249	Office Buildings (Finished, SI	Mercer	Ewing Twp.	00322	00001	11,450.00
Ewing Headquarters Thiokol Bldg. # 8 - Print Shop	4250	Warehouses (Distribution, SI	Mercer	Ewing Twp.	00322	00001	11,450.00
Ewing Headquarters Thiokol Bldg. # 9 - Concrete Testing	4253	Laboratories	Mercer	Ewing Twp.	00322	00001	1,200.00
Square Footage Total - Land ID - 9263							87,350.00
Land ID - 9264							
Ewing Headquarters Central Steam Plant	1480	Industrial Buildings (Light and	Mercer	Ewing Twp.	00320	00008	3,789.00
Ewing Headquarters Fernwood Bldg. # 1 - Office / Car & Truck Shop	1439	Maintenance (Equip	Mercer	Ewing Twp.	00320	00008	42,374.00
Ewing Headquarters Fernwood Bldg. # 10 - Vehicle Gas Station	1447	Service Stations	Mercer	Ewing Twp.	00320	00008	390.00
Ewing Headquarters Fernwood Bldg. # 11 - Inspection Shop	1448	Garages, Mini-tube (Oil Char	Mercer	Ewing Twp.	00320	00008	19,428.00
Ewing Headquarters Fernwood Bldg. # 13 - Guard House	1449	Golf Cart and Starter (Guard	Mercer	Ewing Twp.	00320	00008	152.00
Ewing Headquarters Fernwood Bldg. # 16 - Soils Building/Emergency Mgt.	1451	Machinery and Equipment SI	Mercer	Ewing Twp.	00320	00008	3,200.00
Ewing Headquarters Fernwood Bldg. # 17 - Construction Shop	1452	Maintenance (Equip	Mercer	Ewing Twp.	00320	00008	16,287.00
Ewing Headquarters Fernwood Bldg. # 18 - Materials Laboratory	1481	Laboratories	Mercer	Ewing Twp.	00320	00008	13,130.00
Ewing Headquarters Fernwood Bldg. # 18A - Materials Laboratory	1482	Laboratories	Mercer	Ewing Twp.	00320	00008	7,229.00
Ewing Headquarters Fernwood Bldg. # 19 - Scale Prototype and Developm	1454	Maintenance (Equip	Mercer	Ewing Twp.	00320	00008	1,928.00
Ewing Headquarters Fernwood Bldg. # 1A - Mower / Machine Shop	6997	Maintenance (Equip	Mercer	Ewing Twp.	00320	00008	22,350.00
Ewing Headquarters Fernwood Bldg. # 2 - Plow Shop	1440	Maintenance (Equip	Mercer	Ewing Twp.	00320	00008	6,740.00
Ewing Headquarters Fernwood Bldg. # 20 - Central Electrical Operation	1455	Maintenance (Equip	Mercer	Ewing Twp.	00320	00008	16,287.00
Ewing Headquarters Fernwood Bldg. # 21 - Sign Shop	1456	Maintenance (Equip	Mercer	Ewing Twp.	00320	00008	16,287.00



F&A 3rd Floor Conference Room Study



Submitted to:

**New Jersey Department Of
Transportation – Trenton, NJ**

Submitted by:



*Excellence Delivered **As Promised***

Feb 2020 – Rev 1

EXHIBIT 'C'

TABLE OF CONTENTS

Contents

1.0 BACKGROUND	3
1.1 Description	3
1.2 Option A: Extending the current conference room.	3
1.3 Option B: Creating a new standalone conference room.	5
2.0 DESIGN OPTIONS.....	6
2.1 OPTION A: Extending the current conference room.....	6
2.2 OPTION B: A standalone conference room	9
3.0 COST ESTIMATE	12
4.0 COMPARISON.....	12
5.0 CONCLUSION.....	14
6.0 APPENDIX.....	15


1.0 BACKGROUND

1.1 Description

F&A building at the Department of Transportation (DOT) has a growing need for a conference room that can suit up to 30 people on the 3rd floor. The existing conference room can hold up to 14 people and has some comfort issues regarding temperature whether in cooling or heating season. As part of solving this problem, New Jersey Department of Transportation (NJDOT) has proposed two design options considering the space layout and future growth of the staff. This study has been initiated and aims to help NJDOT members make the most viable decision towards a comfortable, energy-sufficient conference room.

Gannett Fleming (GF) has been selected by NJDOT to evaluate both design options in terms of best use of space, energy efficiency and code compliance. Evaluation is to consider all relevant disciplines thoroughly such as electrical and mechanical.

1.2 Option A: Extending the current conference room.

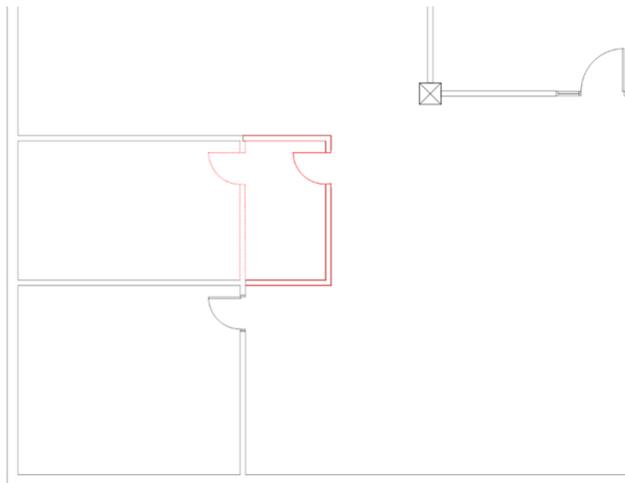

Description

The conference room is currently 270 SQFT. It is located on the perimeter of the building, its 3 windows facing the south. Partition walls used are thin walls. Room includes a conference table that suits 8 people with 6 additional chairs by the finned-tube coils (FTC) to allow for more capacity.

The first option NJDOT proposed is to extend the current conference room to a total area of 377 SQFT. Both mechanical and electrical engineers from Gannett Fleming with support of NJDOT support services (Naveen Penmetcha) surveyed the space on 07/03/19 to confirm the existing conditions of the space and capture any discrepancies from the record drawings used in the survey.

HVAC

The conference room currently has two supply air devices, one is 2'X2' and another linear device located closer to the window area. There is one 2'X2' plenum return air grille. While return air is paramount to any space, plenum return can allow HVAC equipment noise and other noise from surrounding spaces to move freely between different rooms being disruptive as well as not private. Existing air devices seem to be in good condition and do not need to be replaced.

The current VAV Terminal Unit serving the supply air devices in this room is located outside the room and controlled by a temperature sensor that is placed outside the room on the wall separating the space from the elevator area. The elevator space is maintained at a slightly higher temperature during the cooling season and slightly lower temperature during the heating season causing the temperature sensor readings to be influenced by factors outside the space it serves. Moreover, the space surrounding the temperature sensor has different heating & cooling requirements compared to a conference room located on the perimeter of the building and is affected directly by exterior conditions. Such influences can reflect noticeably on occupants' comfort inside the space as well as the energy consumption of the equipment running to maintain the space comfort level and makes controlling the temperature in the space impossible.

The FTC system seems to be controlled in large sections run alongside the perimeter of the building. We could not identify the actuator responsible for the FTC run in the conference room, so we intend to address temperature as part of the design.

Electrical


The existing lights are in good working order and shall be re-used in their existing locations. The existing lighting circuit shall be intercepted ahead of local control and modified for new local control

within the extended conference room. The existing lighting circuit in the open office shall be extended as required to maintain the existing lights and control.

The existing floor receptacle shall be re-used at its existing location for power at the conference room table.

The existing floor communication device shall be re-used at its existing location for communication at the conference room table. Communication devices in the demolished wall shall be removed in their entirety and their cables remove back to source.

1.3 Option B: Creating a new standalone conference room.

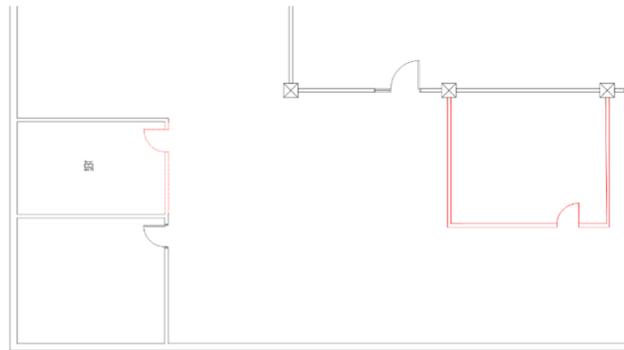

Description

In this option, NJDOT is exploring the modification of an existing open office floor plan to compartmentalize a small area into a new conference room with a total area of 420 SQFT. The wall partition that separates the front of the existing conference room will also be demolished and the room will be added to the open office area.

HVAC

Our survey noted that the zoning (via VAV terminal units) is insufficient. Air devices and ductwork appear to be in good conditions, so there is no need to touch or replace anything unless it's critical to the new design. However, there is not a return grille within the area of work. There are two temperature sensors located on the columns where new walls would be built to accommodate the new room and 3 air devices fed by two different VAV Terminal Units serving this area. The only source of heating this area has is the air introduced to the space through the air devices.

Electrical

The existing lights are in good working order and shall be relocated to new locations within the new conference room and the open office. Raceway and conductors no longer in use shall be removed. The existing lighting circuit shall intercept ahead of local control and modified for new local control to the relocated light fixtures within the new conference room. The existing normal/emergency lighting circuit in the open office shall be extended as required to relocated light fixtures in open office to maintain the existing lights and control.

The existing receptacle that shall be re-used for general use within the new conference room. The existing smoke detector shall be centered within the new conference room.

2.0 DESIGN OPTIONS

2.1 OPTION A: Extending the current conference room

Description

Architecturally, this option includes expanding the current conference room from 210 SQFT to 377 SQFT as shown on plans. The expansion includes modifying the walls and moving/replacing the one door in the room. The current ceiling grid would have to be modified unlike the window area which would not be affected at all.

The ductwork is to be evaluated before re-using for the new design. Schematics of demolition and new work are provided in the appendix with a higher level of information on airflow requirements for the space.

HVAC

The architectural modifications would reflect on the heating and cooling supply air requirements of the room. Typically, engineers and contractors use Cubic Feet of Air per Minute (CFM) to describe the heating and cooling supply air required. The ductwork is to be evaluated before re-using for the new design. Schematics of demolition and new work are provided in the appendix with a higher level of information on airflow requirements for the space.

Also, the new work would include removing the linear and two square air devices as well as parts of the existing ductwork and installing a new VAV Terminal Unit with a re-heat coil to serve the airflow requirements of the new conference room.

The new conference room will include higher occupant capacity, more lights and more electronic devices such as TV screens. Also, since the windows in this room face southeast means the room may get warm early in the morning during the summer at a time it may be quite busy. Hence, a dedicated VAV Terminal Unit serving this room is recommended. It would allow temperature control while the room is occupied and lead to energy savings later when the room is unoccupied. The new VAV Terminal Unit will feed three 2'X2' supply air devices to accommodate for this room extension. We try to eliminate linear air devices in our design as they allow for a high static pressure build-up, and insufficient air distribution.

The new VAV Terminal Unit will connect to the main duct adjacent to the current VAV Terminal Unit (VAV-3-5) serving the area. This would allow less airflow to pass through VAV-3-5. In this case, all the air devices being fed by this terminal unit will require rebalancing to new airflows that we will provide. The air devices in the office adjacent to the next room shall maintain the current airflow since this office hosts a large window area which simply means higher CFM requirements. Air devices around the perimeter of the floor will have a higher airflow compared to the interior air devices. Preliminary and final Testing & Balancing (TAB) is required to verify the system is operating as intended. This way we can determine how much airflow each and every air device is getting so we can still introduce the same level of comfort to the area surrounding the new conference room. See plans for rebalancing information.

The new VAV Terminal Unit shall have a hot-water heating coil. Therefore, new heating-hot-water supply & return pipes shall be installed and connect between the new VAV Terminal Units and the existing supply and return pipes serving the rest of the VAV Terminal Units. See Appendix C for more information.

A new temperature sensor will need to be installed on an internal wall inside the conference room so it can directly read room temperature without the influence of heat conducted through the envelope of the building. The temperature sensor shall serve the new VAV Terminal Unit (VAV-3-9). This would allow for a much better controllability especially during the heating season when the FTC is running. The temperature sensor would drive the VAV Terminal Unit to minimum position as soon as the conference room reaches the temperature setpoint -whether in heating or cooling season- which means maintaining comfort while saving energy.

The VAV Terminal Unit occupied/unoccupied schedule will be integrated with the lighting as follows:

- When motion is detected, lighting is activated and the VAV Terminal Unit enters Occupied Mode.
- When no motion is detected after a specified time interval (adj.), lighting is deactivated and the VAV Terminal Unit enters Unoccupied Mode.
- If the occupants were to turn off the light for a presentation or other purposes, the VAV Terminal Unit shall remain in the occupied mode as the it is solely tied to the motion detector.

Notice: The standard lead time tends to be 4-6 weeks. However, Trane offers a 2-week quick ship for their clients.

Furthermore, the current return air system is ceiling plenum. Typically, noise can transfer easily between different rooms in such layout. The location of the current return air grille in the conference room is fine. However, we propose adding a Z-Duct return system that would mitigate the noise problem even when the conference room is fully occupied. This duct shall carry all the return air from the conference room away from the plenum (the space above the ceiling up to the bottom of the slab including the structure) and closer to the structure. See appendix D for return air duct layout detail

Electrical

The local lighting circuit shall be intercepted ahead of local control, then extended through a new room controller which shall control the lights in the extended conference room. A PIR (passive infra-red) ceiling motion sensor shall provide motion control and a low voltage switch shall provide manual control of lights in the extended conference room to meet energy code and help maximize energy savings. The system shall be integrated with the building management system to control the associated VAV Terminal Unit occ./unocc. Schedule. A relay interface will receive motion information from the ceiling mounted motion sensor to control HVAC within the extend conference room. The lighting circuit in the open office shall be extended to the existing light fixtures to maintain existing controls.

Receptacles shall be added on the walls for general use. The existing floor box shall be used for power at the conference room table. New circuit breakers in existing GE panelboard, raceway, and conductors shall be added for power to the new receptacles and conference room VAV.

The existing communication device shall be used for communication at the conference room table.

A fire alarm notification device and smoke detector shall be added in the conference room for life safety and activation. Both devices shall be connected to the existing fire alarm system.

2.2 OPTION B: A standalone conference room

Description

This option entails building a new standalone conference room in the location shown on the plans. Currently, it is an open area except for stacks of documents and some filing cabinets. As we can see on the plans in Appendix C, 3 walls would be adjacent to the open office space and 1 adjacent to the elevator area. The ceiling grid may have to be modified to accommodate for the new room. Door location is to be determined later. The space would not have any windows as it is in the core of the office.

Also, the front wall partition of the existing conference room would be demolished making the existing conference room part of the open office area.

Based on our survey, we have noticed the partitions used across the building to add new rooms seem to be thin walls. Therefore, a noise problem is almost guaranteed for other occupants within the same zone especially when the new conference room is fully occupied.

HVAC

Mechanically speaking, to be able to support this option, we propose demolishing the three air devices and relocating the two temperature sensors noted on the plans. The elbow where the duct branch feeding VAV-3-6 is turning can be removed and prepared for another fitting to allow for new work connection. All ductwork should be evaluated for re-use or replacing with new.

The new design comprises adding a new VAV Terminal Unit, tied into the same duct branch feeding VAV-3-10 and feeding 2-new air devices as shown on the plans. Supply air devices added include two 2'X2' supply air as well as one 2'X2' return air grille.

The new VAV Terminal Unit shall have a hot-water heating coil. Therefore, new heating-hot-water supply & return pipes shall be installed and connect between the new VAV Terminal Units and the existing supply and return pipes serving the rest of the VAV Terminal Units. See Appendix C for more information.

A new temperature sensor will need to be installed on an internal wall inside the conference room so it can directly read room temperature without the influence of heat conducted through the envelope of

the building. The temperature sensor shall serve the new VAV Terminal Unit (VAV-3-6). This would allow for a much better controllability especially during the heating season when the FTC is running. The temperature sensor would drive the VAV Terminal Unit to minimum position as soon as the conference room reaches the heating temperature setpoint -whether in heating or cooling season- which means maintaining comfort while saving energy.

The VAV Terminal Unit occupied/unoccupied schedule will be integrated with the lighting as follows:

- When motion is detected, lighting is activated and the VAV Terminal Unit enters Occupied Mode.
- When no motion is detected after a specified time interval (adj.), lighting is deactivated and the VAV Terminal Unit enters Unoccupied Mode.
- If the occupants were to turn off the light for a presentation or other purposes, the VAV Terminal Unit shall remain in the occupied mode as the it is solely tied to the motion detector.

Notice: The standard lead time tends to be 4-6 weeks. However, Trane offers a 2-week quick ship for their clients.

The relocated temperature sensors to be mounted in the locations shown on plans and made sure to be tied each to its respective VAV Terminal Unit.

General recommendation: wherever there is demo and new work, the contractor shall investigate the current system and connections between system elements before demolishing any of it, so it is easier to reassemble the different system components and restore their functionality when the new work is finished.

Due to adding this new conference room, a few air devices -marked on plan- would be in close proximity to the new walls causing the conditioned air to come out of the air device, hitting the wall and dropping down. This is not a good design practice as we aim for better air “throw” out of the air device. Also, having added VAV-3-10 of the same branch feeding VAV-3-6, there is only 540 CFM left to feed 10 air devices out of VAV-3-6 which equals to 54 CFM at each. To solve this issue, we propose removing 3 air devices as marked on sheet M001 and relocating 4 more for better air distribution within the space.

A noise problem is expected to occur in OPTION B due to room location and wall partitions expected to be used. However, from a cost estimate point of view, this option may be more feasible due to less air devices and shorter duct runs. See cost estimate below for more information.

In an attempt to mitigate the noise problem, we propose ducting the return grille added as it would carry most of the sound away from the office interior. Such addition is usually recommended where plenum return air and conference room exist. See appendix D for return air duct layout detail.

The ductwork is to be evaluated before re-using for the new design. Schematics of demolitions and new work are provided in appendix C with a higher level of information on airflow requirements for the space.

Note: If the decision is made to go with Option B, we would still recommend adding the same return air duct configuration to the grille in the existing conference room.

Electrical

The light fixtures shall be relocated in existing ceiling grid within the new conference room and the open office. The local lighting circuit shall be intercepted ahead of local control, then extend through a new room controller which shall control the lights in the new conference room. A PIR (passive infrared) ceiling motion sensor shall provide motion control and a low voltage switch shall provide manual control of lights in the new conference room to meet energy code and help maximize energy savings. The system shall be integrated with the building management system to control the associated VAV Terminal Unit occ./unocc. Schedule. A relay interface will receive motion information from the ceiling mounted motion sensor to control HVAC within the new conference room. New raceway and conductors shall be installed to lighting control devices and relocated light fixtures. The normal/emergency lighting circuit in the open office shall be extended to the existing normal/emergency lights to maintain existing control and life safety egress.

Receptacles shall be added on the walls for general use along with the existing receptacle. A poke-thru floor box shall be added for power at the conference table. The poke-thru shall have the option for the owner to install communication device. New circuit breakers in existing GE panelboard, raceway, and conductors shall be added for power to the new receptacles, poke-thru, and conference room VAV.

Fire alarm notification devices shall be added in the conference room and open office for life safety and will be connected to the existing fire alarm system. The smoke detector shall be relocated to the new conference room and reconnected to the existing fire alarm system.

3.0 COST ESTIMATE

The attached cost estimate was developed through the use of CostWorks 2019 paired with construction-based experience. This cost estimate is based on schematic level documentation and further design development would result in more accurate costing.

At a glance, the mechanical scope of work is quite similar in both design options with almost the same amount of work as in adding a VAV Terminal Unit dedicated for serving the conference room, adding a temperature sensor, a few air devices, extending heating hot water piping (HHWS/R) and so on as previously mentioned. That only resulted in less than \$2000 difference between both options.

However, once we jump to the electrical scope of work, Option B seems to be a little bit over \$4000 more than option A due to more demolition work as well as adding new equipment that is currently not available to all.

In accounting for labor, we went with the assumption that all workers would be working in the evening and/or on weekends since the 3rd floor is already occupied and DOT cannot afford having their staff away while work is being done nor its efficient to accomplish office work while tradesmen are doing their work. This means, labor cost is going to be slightly higher than what is expected. See appendix E for cost estimate outline.

4.0 COMPARISON

The major purpose of the study is to assist NJDOT Team in their decision making regarding which design option to proceed with. We have worked on a few mutual design elements and compared the options based on them. Before we reveal which design option we think makes more sense, let us look at different aspects of each option:

	OPTION A	OPTION B
HVAC DEMO WORK	3 air devices and their respective ductwork need to be demolished. Old duct connections to be capped and insulated.	A total of (6) 2'X2' air devices to be demolished back to branch duct, (4) 2'X2' air devices be relocated, 2 temperature sensors to be relocated, old duct

		connections to be capped and insulated.
HVAC NEW WORK	1 VAV Terminal Unit, 1 temperature sensor and 3 2'X2' air devices to be installed, 13 air devices to be tested and rebalanced, new supply as well as return ductwork and duct connections to be added.	1 VAV Terminal Unit, 1 temperature sensor, 2 new air devices (could re-use some of the demolished ones if in good shape), 1 new return grille, return duct, supply ductwork to new and relocated air devices, ductwork fittings.
HEATING HOT WATER PIPING	Almost 20 feet of piping required for both supply & return and pipe fittings	Almost 20 feet of piping required for both supply & return and pipe fittings
ELECTRICAL	<p>Fewer new lighting, power, and fire alarm devices to be installed.</p> <p>Independent motion sensing lighting control.</p> <p>No relocated devices to be installed.</p> <p>Less new raceway and conductors.</p> <p>No impact on lower floor for power at table.</p> <p>Minimum work in the open office to maintain lighting system.</p>	<p>More new lighting, power, and fire alarm devices to be installed.</p> <p>Independent motion sensing lighting control.</p> <p>Large quantity of relocated devices to be installed.</p> <p>Newer raceway and conductors.</p> <p>Impact on lower floor for power at table.</p> <p>Large amount of work to maintain lighting and fire alarm system.</p>

IMPACT ON SPACE	Extension in room may cause pinch area as it sticks out beyond the adjacent room walls.	This may impact the open office area, but it would feel more natural to the space
COST ESTIMATE	\$31,439	\$41,797

5.0 CONCLUSION

From an architectural standpoint, both options are viable and will definitely answer the need for a conference room with a larger capacity that is energy-efficient and code-compliant.

The financial responsibility of the project has a significant impact on the decision. However, there are other factors to be considered that only the client can answer such as future staff growth, storage area configuration and conference room privacy.

Both design options were examined equally, approached with the best design criteria that is similar to the rest of what’s currently available in the building in addition to a few modifications to optimize the functionality of the system such as controlling the VAV Terminal Unit off the light sensors to leverage equipment controllability. Regardless of which option the client may prefer, we are very confident it will result in a very comfortable office space for all occupants.


6.0 APPENDIX

APPENDIX A – Legend Sheet

APPENDIX B – Demolition Work Schematics

APPENDIX C – New Work Schematics

APPENDIX D – POTTORFF TYPE-Z RETURN AIR DUCT

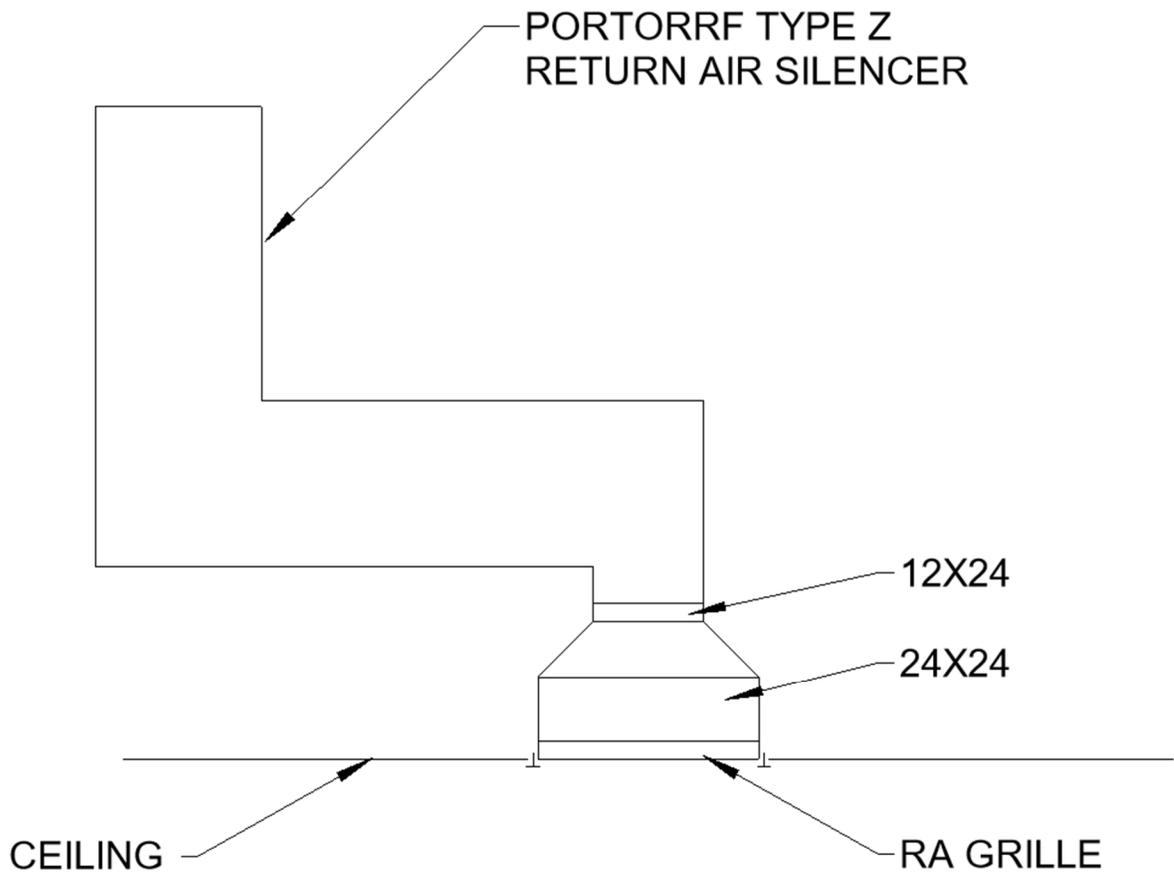

APPENDIX E – COST ESTIMATES



Gannett Fleming

*Excellence Delivered **As Promised***

www.gannettfleming.com

Suite 200

5 Eves Drive

Marlton, NJ 08053

t: 856.396.2226

Offices Worldwide

EXHIBIT 'C'

T0630-00 Photographs of Existing Conditions



Existing Conference Room Space(wall demolished) now part of existing Open Office Area.




Existing Conference Room floor outlets to be demolished and capped.

T0630-00 Photographs of Existing Conditions



Existing Conference Room finned tube coils (FTC) at exterior wall.

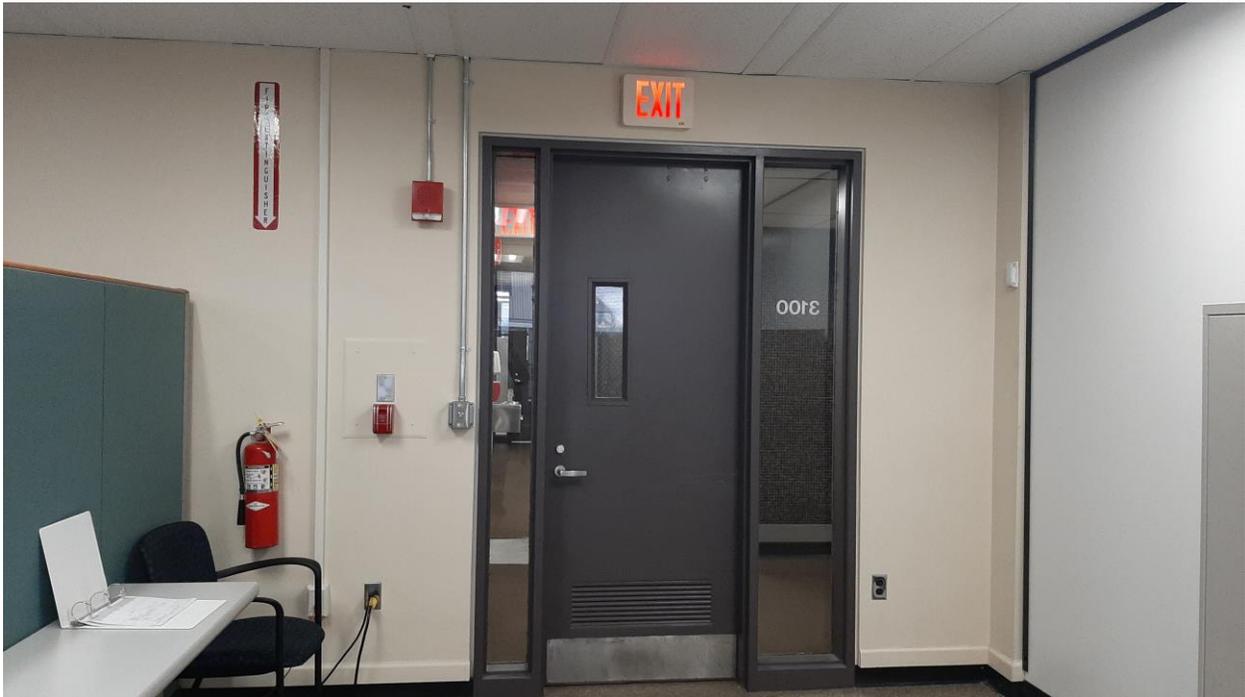

Existing Manual Fire Alarm System in Open Office Area.

T0630-00 Photographs of Existing Conditions



Existing RCP plan showing existing smoke detectors in Open Office Area.



New Conference Room.

T0630-00 Photographs of Existing Conditions



New Conference Room.



Existing RCP to be altered, in the New Conference Room.

T0630-00 Photographs of Existing Conditions



New Conference Room second exit door.



New Conference Room Partitions and Entry from the Open Office Area.